





katalog housing lamp 2022





how to read this catalogue

W NAME PRODUCT H/S 000 LC/S → product number

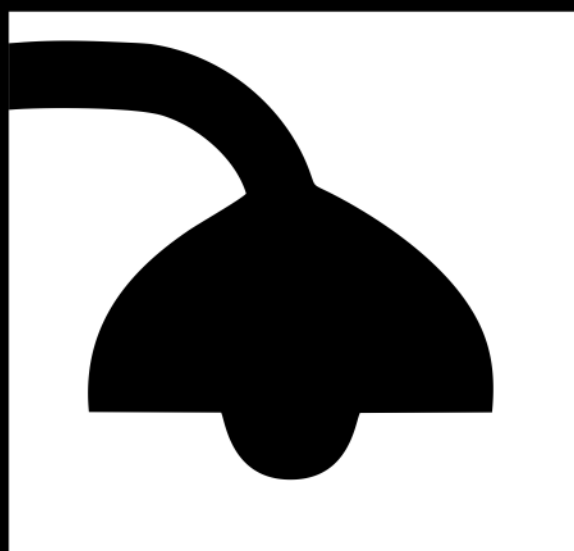

→ dimension

→ product picture

> product number



a. W : winno

b. GMS PRISMATIC : name product

c. H : only housing/set

d. 8 : housing type code

e. 01 : serial number

f. LC : product origin

explore the product number

1. additional code


H : housing only
S : set

2. origin product

LC : local
O : overseas

3. housing type code

7 : downlight
8 : office light
9 : outdoor luminaire
4 : flood and spot light
5 : street and solar cell
6 : wall and pendant light

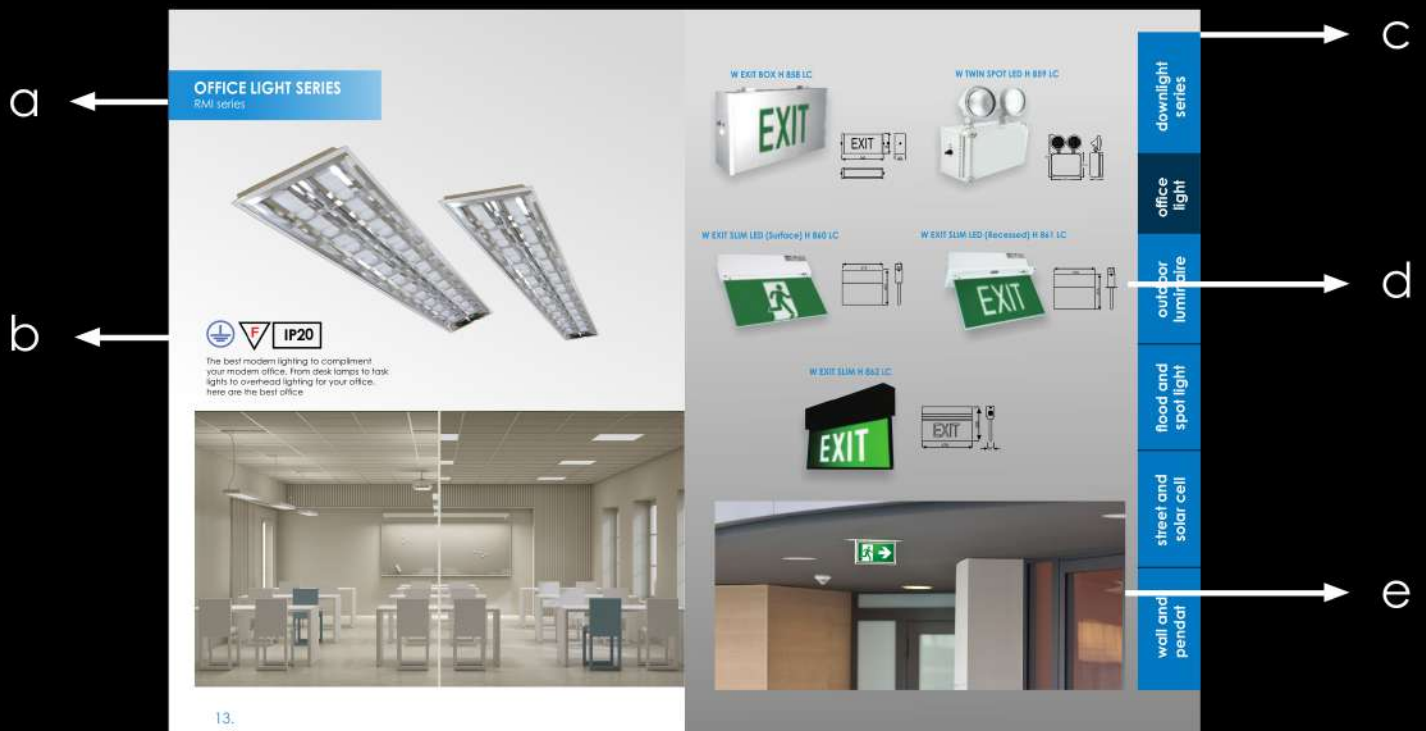

description :

- a. headline
- b. futur
- c. index series
- d. product
- e. product on surfaces



01

downlight series

(page of 1-10)

downlight inbow series
downlight outbow series
downlight SET series



02

office lights

(page of 11-26)

RMI series
balk series
baret & CPOB series
emergency light series



03

outdoor luminaire

(page of 27-38)

underwater light series
garden light series
pedestrian light series

CON TEN TS/ Daftar isi

■ 04

**flood &
spot light**
(page of 39-50)

flood & spot light series
high bay light series

■ 05


**street &
solar cell**
(page of 51-54)

street light series

■ 06

**wall and
pendant**
(page of 55-63)

wall light series
pendant light series



featured in the store

01

A beautiful minimalist downlight

order now

Downlight Series





downlight series
(outbow/inbow)

01 >

downlight inbow series
downlight outbow series
downlight set series

DOWNLIGHT SERIES

downlight inbow series




IP20



a type of ceiling luminaire, usually fully recessed where most of the light is directed downward. may feature an open reflector and/or shielding device.




W DLR-125 H 701 LC




TYPE	DIMENSION (mm)		
	D	D1	H
RD 125	150	125	180
RD 150	175	150	180
RD 175	195	175	180

W DLR-150 EC H 702 LC




TYPE	DIMENSION (mm)		
	D	D1	H
RD 125 EC	150	125	180
RD 150 EC	175	150	180
RD 175 EC	195	175	180

W DLR-175 H H 703 LC




TYPE	DIMENSION (mm)		
	D	D1	H
RD 150 H	175	150	110
RD 175 H	195	165	110

W DLR-150 GL H 704 LC




TYPE	DIMENSION (mm)		
	D	D1	H
RD 150 H	175	150	110
RD 175 H	195	165	110

W DLR-110 MHNTD H 705 LC




TYPE	DIMENSION (mm)		
	D	D1	H
70 W	155	110	75
150 W	220	175	100



W DLR-175 H H 706 LC



W DLR-A H 707 LC



W DLR-SQ H 708 LC

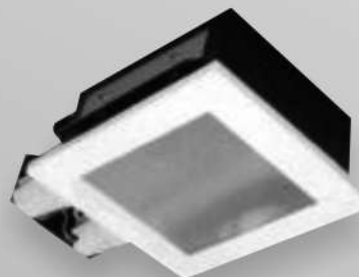

DOWNLIGHT
RECESSED LIGHT

downlight
series

office
light

outdoor
luminaire

flood and
spot light

street and
solar cell

wall and
pendat

downlight
series

office
light


outdoor
luminaire

flood and
spot light


street and
solar cell

wall and
pendat


W DLR-KEONG H 709 LC




W DLR-MTAK H 710 LC




W DLR-KEONG CMD-T H 711 LC




W DLR-COMET RH H 712 LC



W DLR-Wall Washer H 713 LC



W DLR-PINHOLE RH H 714 LC

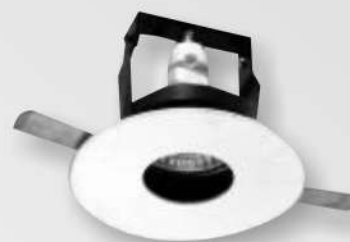


DIMENSION (mm)

D	H
108	98




W DLR-DEEP R1 H 715 LC

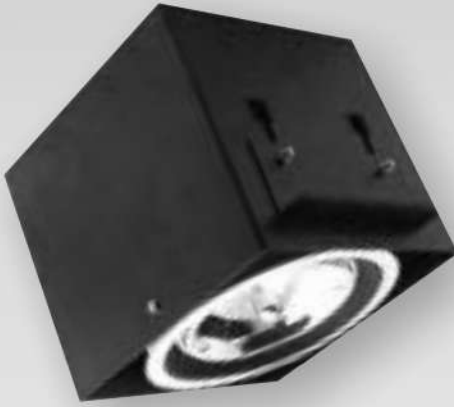

DIMENSION (mm)

W	H	L
158	200	158
158	200	308
158	200	460



ROSET PLAT H 717 LC



DIMENSION (mm)

D	H
92	62

W DLR-DEEP TRIM 1H 716 LC

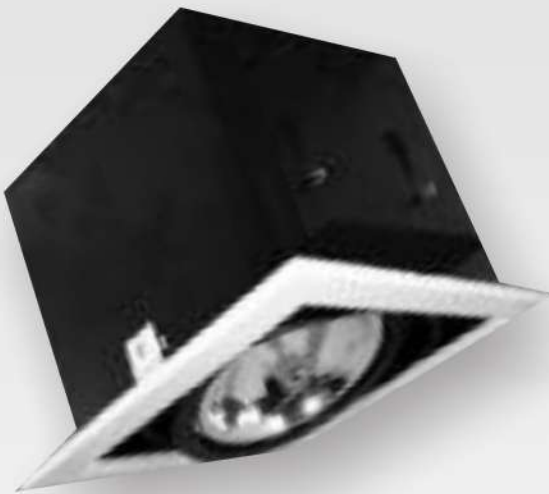

DIMENSION (mm)

W	H	L
158	200	158
158	200	308
158	200	460



downlight
series

office
light

outdoor
luminaire

flood and
spot light

street and
solar cell

wall and
pendat

DOWNLIGHT SERIES

downlight inbow series




IP20

The use of surface Mounted LED Downlight gives the room a minimalist architectural feel but without the 'emptiness' commonly associated with recessed Downlights.


A series of surface Downlights can show off your true interior design flare and create a pattern of ambient and practical light. Have a look at these additional options.




W DLS-DOB 5 H 718 LC



W DLS-DOB 5 SQ H 719 LC



W DLS-DOB 5 GLS H 720 LC



DOWNLIGHT
OUTBOW LIGHT

downlight
series

office
light

outdoor
luminaire

flood and
spot light

street and
solar cell

wall and
pendat

DOWNLIGHT SERIES

downlight SET series










IP20

Pf 0,9

> including LED Downlight

name product	voltage	power factor	current	frequency	power	material
W DLR-COB LED 5W S 721 OS	230,80 V	0,9010	0,0250 A	50,00 Hz	5,40 W	aluminium alloy
luminous flux : 480,7 lm ,efficiency : 85,32 lm/W, radiant : 1,474 W						
W DLR-COB LED 9W S 722 OS	230,80 V	0,9530	0,0470 A	50,00 Hz	5,40 W	aluminium alloy
luminous flux : 853,4 lm ,efficiency : 82,06 lm/W, radiant : 2,819 W						
W DLR-COB LED 20W S 723 OS	230,80 V	0,9660	0,0960 A	50,00 Hz	21,90 W	aluminium alloy
luminous flux : 1804,2 lm ,efficiency : 82,38 lm/W, radiant : 3,56 W						
W DLR-COB LED 15W S 724 OS	230,80 V	0,9690	0,0700 A	50,00 Hz	15,60 W	aluminium alloy
luminous flux : 1303,2 lm ,efficiency : 83,54 lm/W, radiant : 4,194 W						
W DLR-COB LED 30W S 725 OS	230,80 V	0,9660	0,1310 A	50,00 Hz	28,90 W	aluminium alloy
luminous flux : 2564,94 lm ,efficiency : 88,75 lm/W, radiant : 7,043 W						

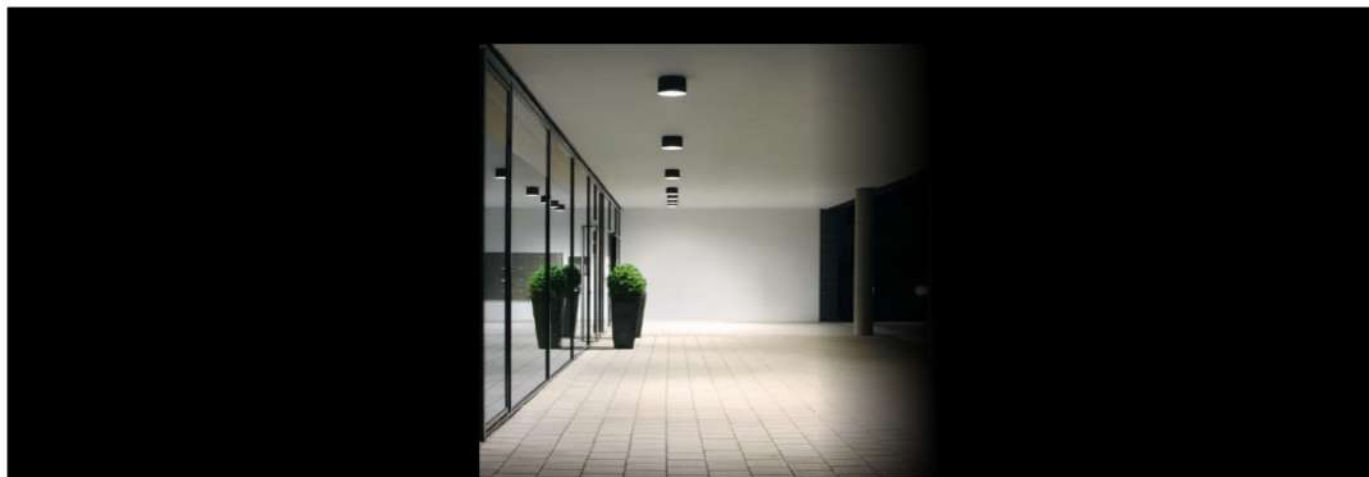



TYPE	DIMENSION (mm)		
	D	D1	H
RD 125 3,6,9W	150	125	80
RD 150 12,15,18W	175	150	80
RD 175 28,36,50 W	195	175	80

downlight
series

office
light

outdoor
luminaire

flood and
spot light

street and
solar cell

wall and
pendat

DOWNLIGHT SET LIGHT



featured in the store

02

**lighting ideas for your
workplace & home office.**

order now

office light series





office light series
(outbow)

02 >

RMI series
balk series
emergency light
series

OFFICE LIGHT SERIES

RMI series




IP20


The best modern lighting to compliment your modern office. From desk lamps to task lights to overhead lighting for your office, here are the best office




W RM M4 + DIFFUSER AC H 827 LC

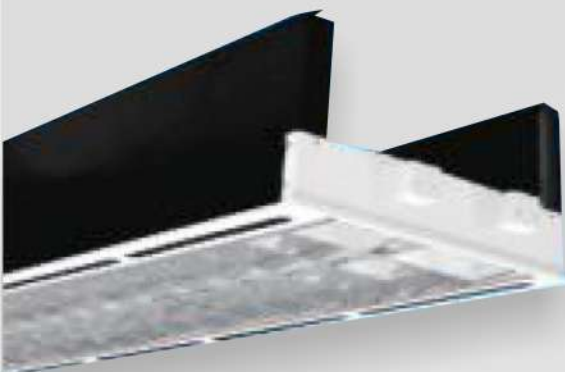


TYPE LED-FL	DIMENSION (mm)				
	W	W1	L	L1	H
2 x 9-18	395	275	595	575	202
3 x 9-18	595	575	595	575	202
4 x 9-18	595	575	595	575	202
2 x 18-36	395	275	1195	1175	202
3 x 18-36	595	575	1195	1175	202
4 x 18-36	595	575	1195	1175	202




W RM M5 + DIFFUSER AC H 828 LC

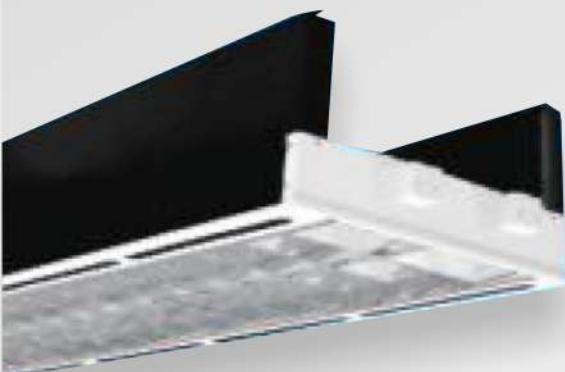


TYPE LED-FL	DIMENSION (mm)				
	W	W1	L	L1	H
2 x 9-18	395	275	595	575	202
3 x 9-18	595	575	595	575	202
4 x 9-18	595	575	595	575	202
2 x 18-36	395	275	1195	1175	202
3 x 18-36	595	575	1195	1175	202
4 x 18-36	595	575	1195	1175	202



W RM M1 + DIFFUSER AC H 829 LC

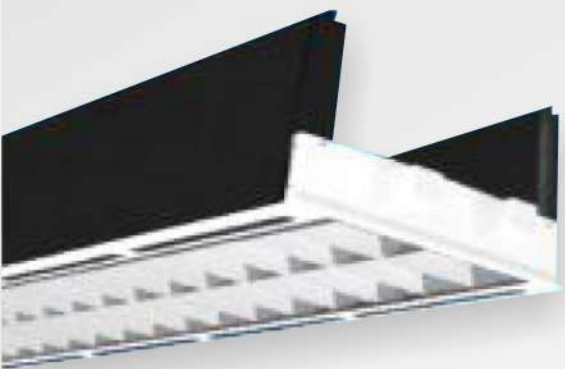


TYPE LED-FL	DIMENSION (mm)				
	W	W1	L	L1	H
2 x 9-18	395	275	595	575	202
3 x 9-18	595	575	595	575	202
4 x 9-18	595	575	595	575	202
2 x 18-36	395	275	1195	1175	202
3 x 18-36	595	575	1195	1175	202
4 x 18-36	595	575	1195	1175	202



W RM M2 + DIFFUSER AC H 830 LC



TYPE LED-FL	DIMENSION (mm)				
	W	W1	L	L1	H
2 x 9-18	395	275	595	575	202
3 x 9-18	595	575	595	575	202
4 x 9-18	595	575	595	575	202
2 x 18-36	395	275	1195	1175	202
3 x 18-36	595	575	1195	1175	202
4 x 18-36	595	575	1195	1175	202



downlight
series

office
light


outdoor
luminaire

flood and
spot light

street and
solar cell


wall and
pendat

W RM M5 H 831 LC




TYPE	DIMENSION (mm)			
	W	W1	L	L1
LED-FL				H
3 x Ø-18	202	272	202	272
3 x Ø-18	202	272	202	272
4 x Ø-18	202	272	202	272
5 x 18-36	202	272	1102	1172
3 x 18-36	202	272	1102	1172
4 x 18-36	202	272	1102	1172

W RM M4 H 832 LC




TYPE	DIMENSION (mm)			
	W	W1	L	L1
LED-FL				H
3 x Ø-18	202	272	202	272
3 x Ø-18	202	272	202	272
4 x Ø-18	202	272	202	272
5 x 18-36	202	272	1102	1172
3 x 18-36	202	272	1102	1172
4 x 18-36	202	272	1102	1172

W RM M1 H 833 LC




TYPE	DIMENSION (mm)			
	W	W1	L	L1
LED-FL				H
3 x Ø-18	202	272	202	272
3 x Ø-18	202	272	202	272
4 x Ø-18	202	272	202	272
5 x 18-36	202	272	1102	1172
3 x 18-36	202	272	1102	1172
4 x 18-36	202	272	1102	1172

W RM M2 H 834 LC




TYPE	DIMENSION (mm)			
	W	W1	L	L1
LED-FL				H
3 x Ø-18	202	272	202	272
3 x Ø-18	202	272	202	272


TYPE LED-FL	DIMENSION (mm)				
	W	W1	L	L1	H
2 x 9-18	395	275	595	575	95
3 x 9-18	595	575	595	575	95
4 x 9-18	595	575	595	575	95
2 x 18-36	395	275	1195	1175	95
3 x 18-36	595	575	1195	1175	95
4 x 18-36	595	575	1195	1175	95




TYPE LED-FL	DIMENSION (mm)				
	W	W1	L	L1	H
2 x 9-18	395	275	595	575	95
3 x 9-18	595	575	595	575	95
4 x 9-18	595	575	595	575	95
2 x 18-36	395	275	1195	1175	95
3 x 18-36	595	575	1195	1175	95
4 x 18-36	595	575	1195	1175	95



TYPE LED-FL	DIMENSION (mm)				
	W	W1	L	L1	H
2 x 9-18	395	275	595	575	95
3 x 9-18	595	575	595	575	95
4 x 9-18	595	575	595	575	95
2 x 18-36	395	275	1195	1175	95
3 x 18-36	595	575	1195	1175	95
4 x 18-36	595	575	1195	1175	95



TYPE LED-FL	DIMENSION (mm)				
	W	W1	L	L1	H
2 x 9-18	395	275	595	575	95
3 x 9-18	595	575	595	575	95
4 x 9-18	595	575	595	575	95
2 x 18-36	395	275	1195	1175	95
3 x 18-36	595	575	1195	1175	95
4 x 18-36	595	575	1195	1175	95



W RM M5 + DUMMY H 835 LC



W RM M4 + DUMMY H 836 LC



W RM M1 + DUMMY H 837 LC



W RM M2 + DUMMY H 838 LC



downlight
series

office
light

outdoor
luminaire

flood and
spot light

street and
solar cell

wall and
pendat

OFFICE LIGHT SERIES

balk series





IP20

IP65

Light is our Passion. Innovative lighting systems from Balk Series offer you the freedom to stage your performance individually with extraordinary highlights.





W TKI c/w Acrylic H 839 LC

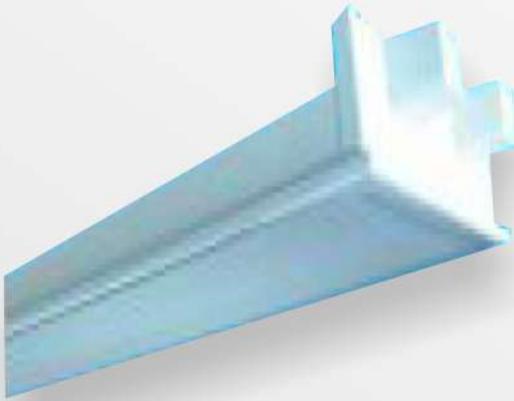

TYPE LED-FL	DIMENSION (mm)				
	W	W1	L	L1	H
2 x 10-18	295	275	595	575	125
3 x 10-18	595	575	595	575	125
4 x 10-18	595	575	595	575	125
2 x 19-36	295	275	1195	1175	125
3 x 19-36	595	575	1195	1175	125

W TKI H 840 LC

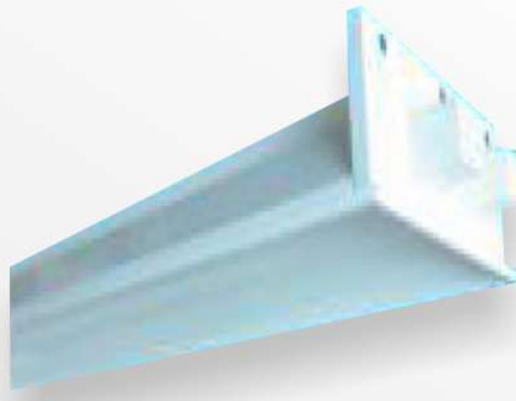


TYPE LED-FL	DIMENSION (mm)				
	W	W1	L	L1	H
2 x 10-18	295	275	595	575	125
3 x 10-18	595	575	595	575	125
4 x 10-18	595	575	595	575	125
2 x 19-36	295	275	1195	1175	125
3 x 19-36	595	575	1195	1175	125

downlight
series

office
light


outdoor
luminaire

W SM M5 H 841 LC



TYPE LED-FL	DIMENSION (mm)		
	W	L	H
2 x 10-18	300	600	100
3 x 10-18	600	600	100
4 x 10-18	600	600	100
2 x 19-36	300	1220	100
3 x 19-36	600	1220	100

W RM M5 T5 H 842 LC



TYPE FL T5	DIMENSION (mm)				
	W	W1	L	L1	H
2 x 14	295	275	595	575	95
3 x 14	595	575	595	575	95
4 x 14	595	575	595	575	95
2 x 28	295	275	1195	1175	95
3 x 28	595	575	1195	1175	95

flood and
spot light

street and
solar cell

wall and
pendat

downlight
series

office
light



outdoor
luminaire

flood and
spot light

street and
solar cell

wall and
pendat

W BALK H 843 LC

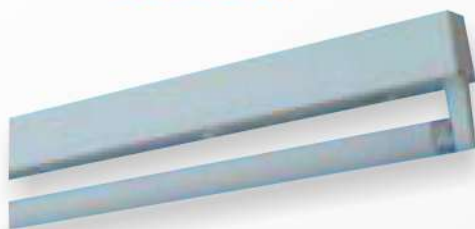


TYPE LED-FL	DIMENSION (mm)		
	W	L	H
1 x 10-18	50	610	40
2 x 10-18	100	610	40
1 x 18-36	50	1222	40
2 x 18-36	100	1222	40

W GMS H 844 LC




TYPE LED-FL	DIMENSION (mm)		
	W	L	H
1 x 10-18	50	610	105
2 x 10-18	100	610	105
1 x 18-36	50	1222	105
2 x 18-36	100	1222	105

W V-SHAPE H 845 LC



TYPE LED-FL	DIMENSION (mm)		
	W	L	H
1 x 10-18	135	610	50
2 x 10-18	135	610	50
1 x 18-36	135	1222	50
2 x 18-36	135	1222	50

W GMS PRISMATIC H 846 LC

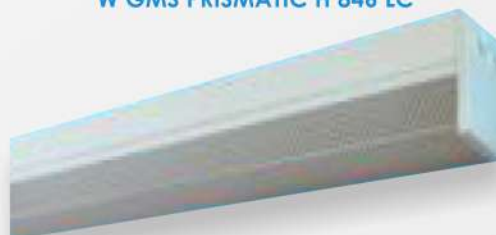



TYPE LED-FL	DIMENSION (mm)		
	W	L	H
1 x 10-18	50	610	105
2 x 10-18	100	610	105
1 x 18-36	50	1222	105
2 x 18-36	100	1222	105

W BALK c/w WIRE GUARD H 847 LC



TYPE LED-FL	DIMENSION (mm)		
	W	L	H
1 x 10-18	50	610	105
2 x 10-18	100	610	105
1 x 18-36	50	1222	105
2 x 18-36	100	1222	105

W V-SHAPE c/w MIRROR H 848 LC

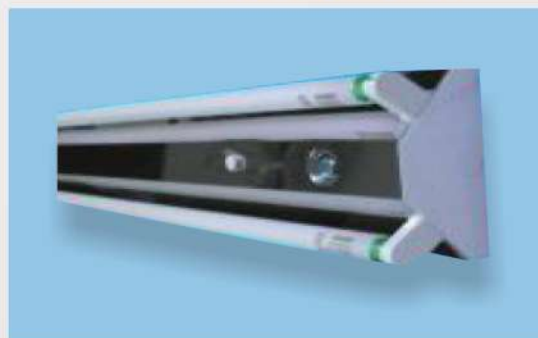

TYPE LED-FL	DIMENSION (mm)		
	W	L	H
1 x 10-18	135	610	50
2 x 10-18	135	610	50
1 x 18-36	135	1222	50
2 x 18-36	135	1222	50

downlight
series

office
light


outdoor
luminaire

flood and
spot light

street and
solar cell


wall and
pendat

W TKO H 849 LC

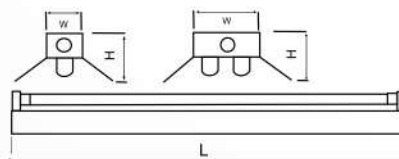


TYPE LED-FL	DIMENSION (mm)		
	W	L	H
1 x 10-18	55	610	70
2 x 10-18	100	610	80
1 x 18-36	55	1222	70
2 x 18-36	100	1222	80

W DUST PROOF H 850 LC

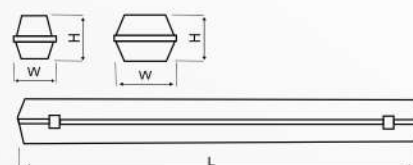



TYPE LED-FL	DIMENSION (mm)		
	W	L	H
1 x 10-18	102	702	115
2 x 10-18	172	702	115
1 x 18-36	102	1312	115
2 x 18-36	172	1312	115

W TKO c/w ACRYLIC H 851 LC

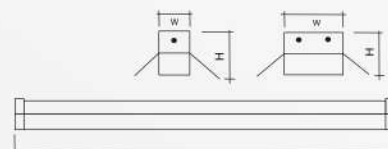

TYPE LED-FL	DIMENSION (mm)		
	W	L	H
1 x 10-18	55	610	105
2 x 10-18	100	610	105
1 x 18-36	55	1222	105
2 x 18-36	100	1222	105

W TKO c/w WIRE GUARD H 852 LC

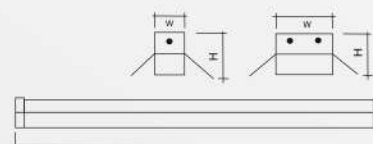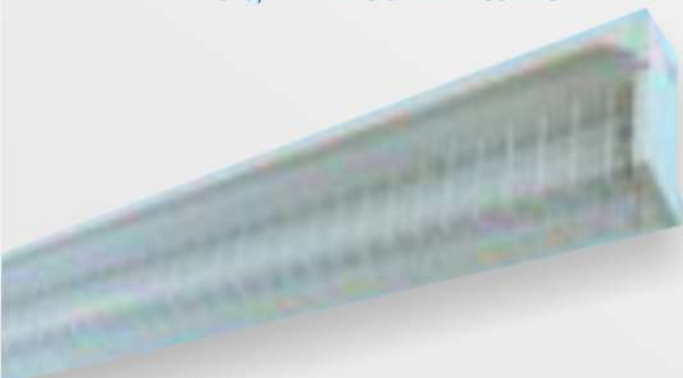

TYPE LED-FL	DIMENSION (mm)		
	W	L	H
1 x 10-18	55	610	105
2 x 10-18	100	610	105
1 x 18-36	55	1222	105
2 x 18-36	100	1222	105

OFFICE LIGHT SERIES

baret & cpob series




IP20


The basic cleanroom fixture types are teardrop, recessed, surface mount and integral ceiling grid. The selection of fixture type usually depends on the cleanroom classification. Teardrop light fixtures were the standard in cleanroom illumination for many years.




W ROUND BARET H 853 LC



W UFO BARET H 854 LC



W SQUARE BARET H 855 LC




W CPOB 2x18 H 856 LC



TAMPAK ATAS

TYPE	DIMENSION (mm)		
	W	L	H
2x18	330	670	115+35
2x36	330	1275	115+35

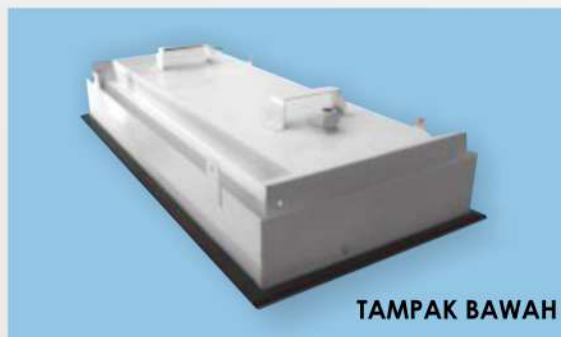

TAMPAK BAWAH

W CPOB 2x36 H 857 LC



TAMPAK ATAS

TYPE	DIMENSION (mm)		
	W	L	H
2x18	300	635	11
2x36	300	1245	11



TAMPAK BAWAH

downlight
series

office
light

outdoor
luminaire

flood and
spot light

street and
solar cell

wall and
pendat

OFFICE LIGHT

emergency light series



IP20

Slimline LED

- Ultra bright white LEDs meeting ISO safety colour requirements.
- Exceeds IEC 60598-2-22 and S5 563 brightness requirements.
- Extra low power consumption.
- High Quality, Long Life SMD LED module.
- High efficiency charger and LED converter.
- Series connection of LEDs provides equal biasing of all LEDs ensures maximum LED life span and uniform light distribution.
- Add-on plate for recess mounting
- Low battery voltage cut-off latch function, to eliminate battery over discharge.
- Charge indicator and test switch.

Technical Specifications

Model Number : EX-LED-M

Mode Of Operation : Maintained

Lamp : 1,2 W White LED module with burning life-span

Rated Duration : 3 Hours

Mains Supply : 220-240 Volts

Mains Frequency : 50-60Hz

Power Consumption : 3W (Total standby power inclusive of LED converter)

Battery : High Temperature Nickel Cadmium

Charger : Regulated variable rate

Charger Monitor : LED

Test Facility : Micro switch

Mounting : Surface mount (Recessed mount option available)

Safety Features : Low battery voltage cut off to prevent over discharge

Recharge Period : < 24 Hours

Diffuser : Acrylic plate (Fire retardant)

Fitting Construction : Electro galvanized steel, epoxy powder coating for casing and gear tray

Weight : Approximately 2,1 Kg

Dimensions : 256mm (H) x 376mm (W) x 46mm (D)

Standards / Compliance : IEC 60598-2-22, S5 263 Part 2, S5 563

Approvals : TÜV SÜD PSB, PSB PLS (Product Listing Scheme)



Ordering Guide

Legend	Single Sided	Double Sided
	EX-LED-M-S-RM	EX-LED-M-D-RM
	EX-LED-M-SR-RM	EX-LED-M-DR-RM
	EX-LED-M-SL-RM	EX-LED-M-DL-RM
	EX-LED-M-S	EX-LED-M-D
	EX-LED-M-SR	EX-LED-M-DR
	EX-LED-M-SL	EX-LED-M-DL



Twin Spot LED

- Weatherproof design suitable for outdoor applications.
- Low heat generation, ensures longer and reliable service life.
- Low battery voltage cut-off with latch function, to eliminate battery over discharge
- Charge LED indicator and test button.

TECHNICAL SPECIFICATIONS


Model Number : TED10NM(WP)

Mode of Operation :	Non maintained
Lamp :	2 x 3.6V / 1A Power LED module
Rated Duration :	2 Hours
Mains Supply :	220-240 Volts
Mains Frequency :	50-60Hz
Power Consumption :	< 1,5W
Battery :	High Temperatur Nickel Cadmium
Charger :	Regulated variable rate
Charge Monitor :	LED
Test Facility :	Momentary test switch
Safety Features :	Low battery voltage cut off to prevent over discharge
Recharge Period :	< 24 Hours
Fitting Contruction :	Moulded Fire restardant (UI94) housing and diffuser.
Weight :	Approximately 2.5 Kg
Dimensions :	330mm (W) x 28mm (H) x 130mm (D)
Standards / Compliance :	IEC 60598-2-2-22, SS 263 Part 2, SS 563
Approvals :	PSB Type test, PSB PLS (Product Listing Scheme)


downtight
series

office
light

W EXIT BOX H 858 LC




W TWIN SPOT LED H 859 LC




outdoor
luminaire

W EXIT SLIM LED (Surface) H 860 LC




W EXIT SLIM LED (Recessed) H 861 LC



flood and
spot light

street and
solar cell

W EXIT SLIM H 862 LC



wall and
pendat



downlight
series

office
light

outdoor
luminaire

flood and
spot light

street and
solar cell

wall and
pendant



featured in the store

03

**outdoor lighting plays
a decisive role.**

order now

—
outdoor luminaire





outdoor luminaire
(spot & pedestrian)

03 >

underwater light series
garden light series
pedestrian light series

OUTDOOR LUMINAIRE


underwater light series




IP65

IP68

The Underwater & Floor Uplight series is designed as a versatile lighting solution for both underwater and dry applications where an effective yet unobtrusive light fixture is needed. This LED light produces 800 lumens of pure white light while using only 1 amp at 12 volts.

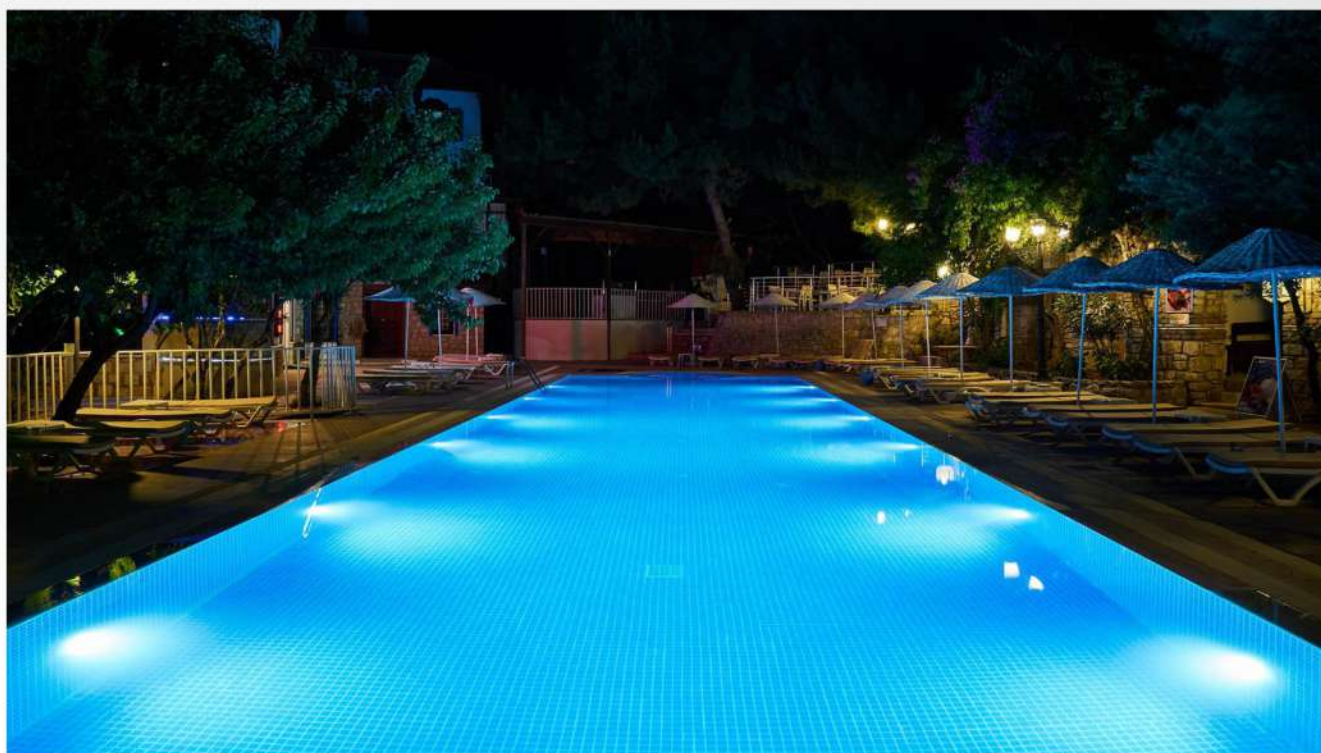


W UWL HL H 963 LC




DIMENSION (mm)		
D	L	H
90	70	63

W UWL PAR56 H 964 LC




DIMENSION (mm)	
D	W
170	95

W FU HL H 965 LC



DIMENSION (mm)		
D	D1	H
130	75	175

W FU PE H 966 LC



DIMENSION (mm)		
D	D1	H
170	165	200

downlight
series

office
light

outdoor
luminaire

flood and
spot light

street and
solar cell

wall and
pendat

OUTDOOR LUMINAIRE

garden light series




IP53

Such As Flood Lights, Street Lights, Factory Lights, Halogen Lights
And Its Accessories. A Total Free Lighting Design For You From Our Top
Experienced Engineering Designer. Fast Delivery. High Quality Products.




W GL i-PHOS H 967 LC



DIMENSION (mm)			
W	W1	H	
120	135	1025	

W GL iSQ-POLE H 968 LC




DIMENSION (mm)			
W	W1	H	
150	135	1025	

downlight
series

office
light


outdoor
luminaire

W GL SQ POLE H 969 LC

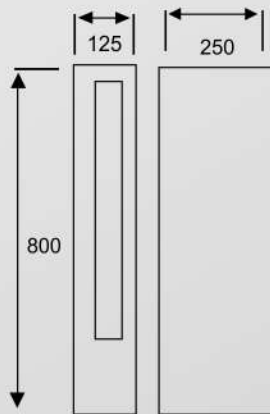

DIMENSION (mm)	
D	H
135	1055

W GL iPOLE H 970 LC



DIMENSION (mm)			
W	W1	H	
125	250	800	

flood and
spot light

street and
solar cell

wall and
pendat

downlight
series

office
light


outdoor
luminaire

flood and
spot light

street and
solar cell

wall and
pendant


W GL SYZPOLE H 971 LC



DIMENSION (mm)

D 135
H 1050


W GL ALMPOLE H 972 LC

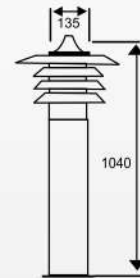

DIMENSION (mm)

D 135
H 1040



W GL ISPIRA H 973 LC



DIMENSION (mm)

D 220
H 1200

W GL ISPIROC H 974 LC

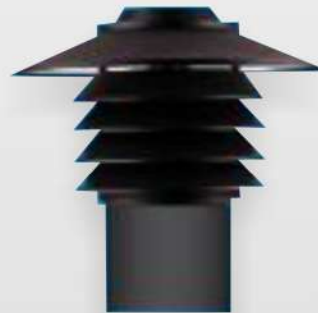


DIMENSION (mm)

D 300
H 1200



W GL COSTAVERDE H 975 LC

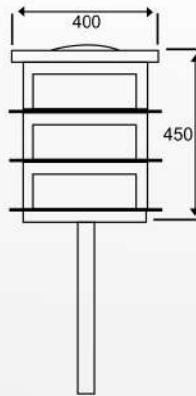


DIMENSION (mm)

W	H
400	450

downlight
series

office
light

W GL BG MILK H 976 LC




DIMENSION (mm)

W	H
300	385

outdoor
luminaire

flood and
spot light

W GL POLYETHYLENE H 977 LC



DIMENSION (mm)

W	H
300	385

street and
solar cell

wall and
pendat

OUTDOOR LUMINAIRE

pedestrian light series



IP53


Exterior Pedestrian Lighting Site Lighting Post Top Plaza Lighting. See more ideas about exterior, pedestrian, lighting.



W GL METRONO H 978 LC




DIMENSION(mm)
D H
550 400



W GL MENZZO H 979 LC




DIMENSION(mm)
D H
550 400



W GL CONELUX H 980 LC




DIMENSION(mm)
D H
480 502



W GL CONEL H 981 LC



DIMENSION(mm)
D H
600 700



downlight
series

office
light

outdoor
luminaire

flood and
spot light

street and
solar cell

wall and
pendat

downlight
series

office
light

outdoor
luminaire

flood and
spot light

street and
solar cell


wall and
pendat

W SL PRISMANA H 982 LC



DIMENSION(mm)

D	H
767	334



W SL COROLA H 983 LC




DIMENSION(mm)

D	H
630	100




W SL TRAPEZIO H 984 LC

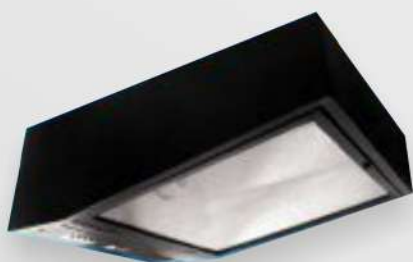

DIMENSION(mm)

L	H	H1
600	120	215




W SL SQUARE H 985 LC




DIMENSION(mm)

L	H
630	150




W CONELUX H 986 LC

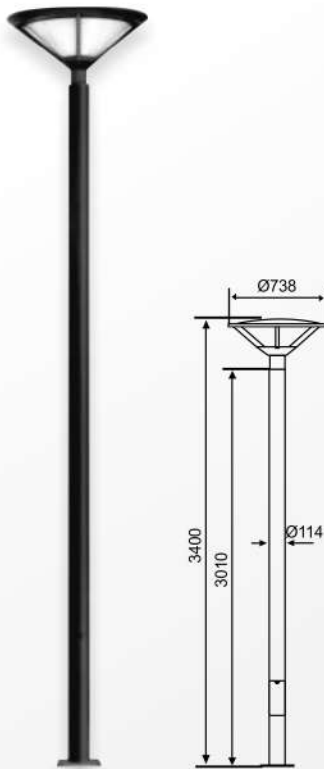


W CONEL H 987 LC



W HAT H 988 LC

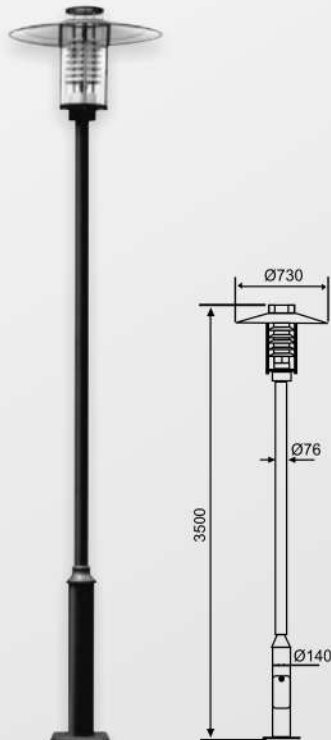

W UMBRELLA H 989 LC

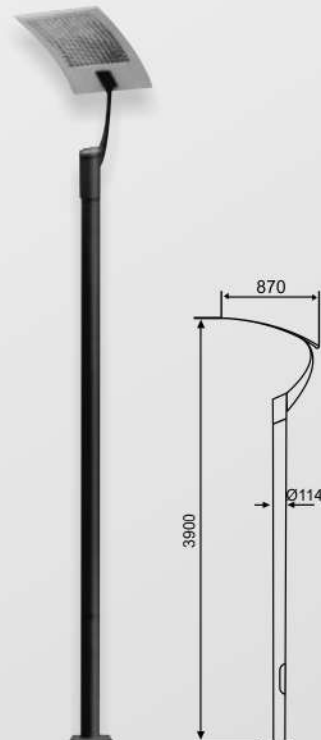

downlight
series

office
light

outdoor
luminaire

flood and
spot light

street and
solar cell

wall and
pendat



featured in the store

04

awesome outdoor lighting ideas for your backyard.

order now

flood and spot light





flood & spot light
(flood & spot)

04 >

flood & spot light series
high bay light

FLOOD & SPOT LIGHT

flood & spot light series



IP65



tegangan	daya	frekuensi	power factor	power efisiensi
70 ~ 285 VAC 8 ~ 24 VDC (Solar Panel Enabled)	10W	50 ~ 60 Hz	≥ 0.90	≥ 90%
LED Efisiensi : ≥ 100 lumens/watt, Beam Angel : ≥ 120°, LED Lifetime : 50.000 hours, Material : Alumunium Alloy, IP Rating : IP65				
70 ~ 285 VAC 8 ~ 24 VDC (Solar Panel Enabled)	20W	50 ~ 60 Hz	≥ 0.90	≥ 90%
LED Efisiensi : ≥ 100 lumens/watt, Beam Angel : ≥ 120°, LED Lifetime : 50.000 hours, Material : Alumunium Alloy, IP Rating : IP65				
70 ~ 285 VAC 8 ~ 24 VDC (Solar Panel Enabled)	30W	50 ~ 60 Hz	≥ 0.90	≥ 90%
LED Efisiensi : ≥ 100 lumens/watt, Beam Angel : ≥ 120°, LED Lifetime : 50.000 hours, Material : Alumunium Alloy, IP Rating : IP65				
70 ~ 285 VAC 8 ~ 24 VDC (Solar Panel Enabled)	50W	50 ~ 60 Hz	≥ 0.90	≥ 90%
LED Efisiensi : ≥ 100 lumens/watt, Beam Angel : ≥ 120°, LED Lifetime : 50.000 hours, Material : Alumunium Alloy, IP Rating : IP65				
70 ~ 285 VAC 8 ~ 24 VDC (Solar Panel Enabled)	100W	50 ~ 60 Hz	≥ 0.90	≥ 90%
LED Efisiensi : ≥ 100 lumens/watt, Beam Angel : ≥ 120°, LED Lifetime : 50.000 hours, Material : Alumunium Alloy, IP Rating : IP65				
70 ~ 285 VAC 8 ~ 24 VDC (Solar Panel Enabled)	150W	50 ~ 60 Hz	≥ 0.90	≥ 90%
LED Efisiensi : ≥ 100 lumens/watt, Beam Angel : ≥ 120°, LED Lifetime : 50.000 hours, Material : Alumunium Alloy, IP Rating : IP65				

Good backyard lighting ideas can transform your yard and max up its potential as an extra space to enjoy in the evening.

The right lighting can spotlight focal points such as planting and help to zone different areas for relaxing, alfresco cooking or gathering or drinks.



IP65

daya	tegangan	frekuensi	efisiensi	luminous flux	faktor daya
500W	85 ~ 265 VAC	50 ~ 60 Hz	100ml/watt	> 50.000ml	>0.95
Angle cahaya : 25°,45°,65°,90°,100°, CRI : 80, LED life : 50.000 hours, IP : IP65, material : aluminium alloy, fin cooling module, tempered glass					
1000W	85 ~ 265 VAC	50 ~ 60 Hz	100ml/watt	> 100.000ml	>0.95
Angle cahaya : 25°,45°,65°,90°,100°, CRI : 80, LED life : 50.000 hours, IP : IP65, material : aluminium alloy, fin cooling module, tempered glass					
80W/100W/120W/150W	85 ~ 265 VAC	50 ~ 60 Hz	120-140ml/watt	≥9.600/12.000/14400/18000ml	>0.95
Angle cahaya : 25°,45°,65°,90°, CRI : 80, LED life : 50.000 hours, IP : IP65, material : aluminium alloy, fin cooling module, tempered glass					
200W	85 ~ 265 VAC	50 ~ 60 Hz	120-140ml/watt	> 24.000ml	>0.95
Angle cahaya : 25°,45°,65°,90°, CRI : 80, LED life : 50.000 hours, IP : IP65, material : aluminium alloy, fin cooling module, tempered glass					
300W	85 ~ 265 VAC	50 ~ 60 Hz	120-140ml/watt	> 36.000ml	>0.95
Angle cahaya : 25°,45°,65°,90°, CRI : 80, LED life : 50.000 hours, IP : IP65, material : aluminium alloy, fin cooling module, tempered glass					



downlight
series

office
light


outdoor
luminaire

flood and
spot light


street and
solar cell

wall and
pendat


W FL E40 2000W H 490 LC

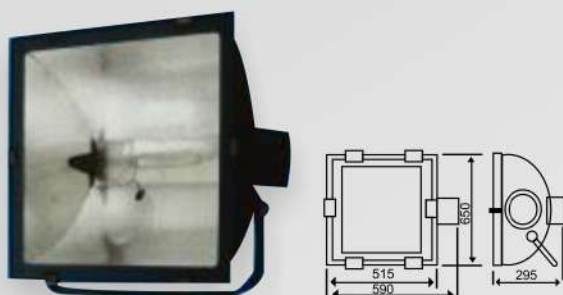


W FL E40 1000W H 491 LC

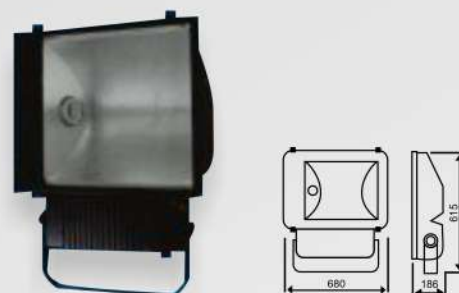


W FL E40 250-400W H 492 LC

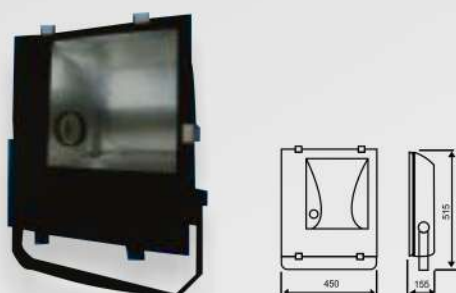


W FL MHN-TD 70-150W H 493 LC

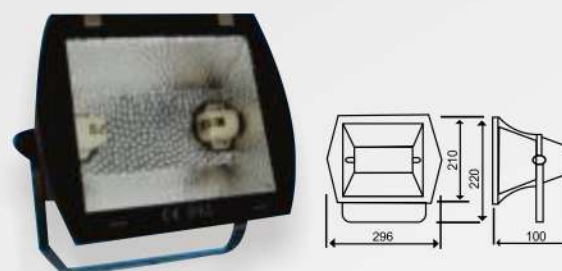

W FL MHN-TD 70-150W H 494 LC

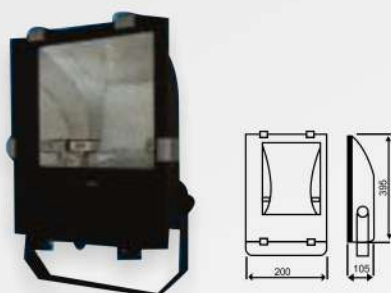

W FL Halogen 1000W H 495 LC

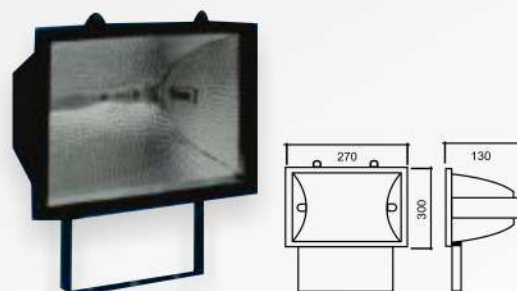


W GL Spot Par 30/75W H 496 LC



W GL Spot Par 30/75W H 497 LC




W FL LED 10W H 4102 LC

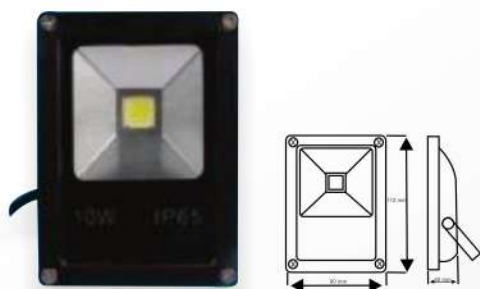

DIMENSION (mm)

L	H	M
90	112	40

W FL LED 20W H 4103 LC

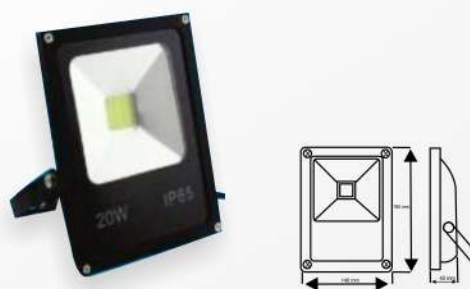

DIMENSION (mm)

L	H	M
140	180	40

W FL LED 30W H 4104 LC



DIMENSION (mm)

L	H
206	165

W FL LED 50W H 4105 LC



DIMENSION (mm)

L	H
250	200



downlight
series

office
light

outdoor
luminaire

flood and
spot light

street and
solar cell

wall and
pendat

downlight
series

office
light


outdoor
luminaire

flood and
spot light


street and
solar cell

wall and
pendat


W SP RMA H 498 LC

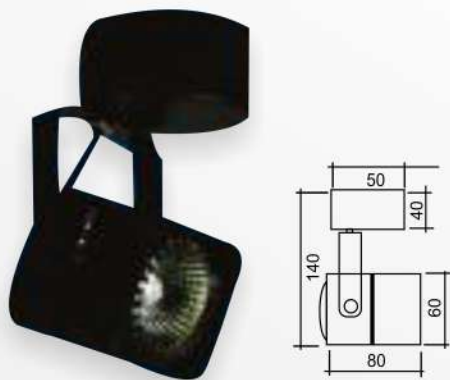


W ST RMR H 499 LC

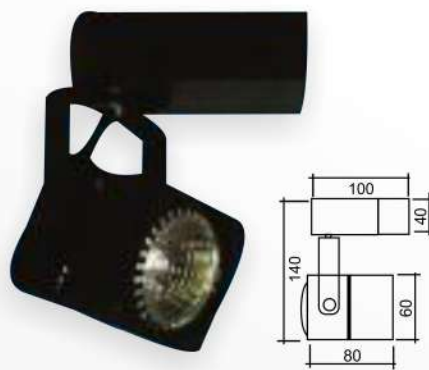




W GL Spot SPA H 4100 LC

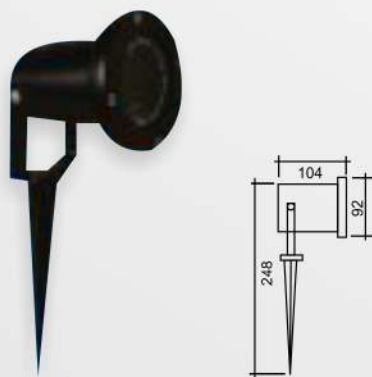



W GL Spot SPR H 4101 LC

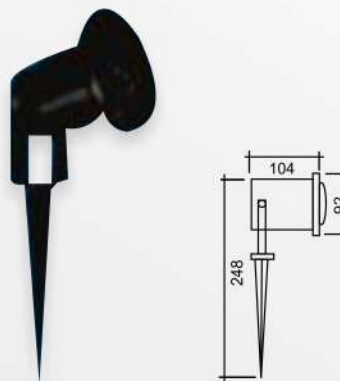


W FL LED 500W H 4108 LC



W FL LED 1000W H 4109 LC




W FL LED 100W H 4106 LC



DIMENSION (mm)

L	H
375	240

W FL LED 150W H 4107 LC



DIMENSION (mm)

L	H
520	236

downlight
series

office
light

outdoor
luminaire

flood and
spot light

street and
solar cell

wall and
pendat

downlight
series




office
light

outdoor
luminaire




flood and
spot light

street and
solar cell
pendat




W FLB LED 80-150W H 4110 LC



W FLB LED 200W H 4111 LC



W FLB LED 300W H 4112 LC



downlight
series

office
light

outdoor
luminaire

flood and
spot light

street and
solar cell

wall and
pendat

FLOOD & SPOT LIGHT

high bay light series




IP65


Explosion-proof Flood Lights. Suitable for Hazardous, Dirty, Wet and High Vibration Areas. Built to Last. Energy efficient. Maintenance-free. Perfect for the Toughest Conditions. High Stock Inventory. Competitive Pricing. Authorized Distributor. Free Quote.

voltage	power	frekuensi	power factor	power efisiensi
70 ~ 285 VAC 8 ~ 24 VDC (Solar Panel Enabled)	50W, 100W, 150W	50 ~ 60 Hz	≥ 0.90	≥ 90%


LED Efisiensi : ≥ 100 lumens/watt, Beam Angel : ≥ 100°, LED Lifetime : 50.000 hours, Material : Aluminium Alloy, IP Rating : IP65

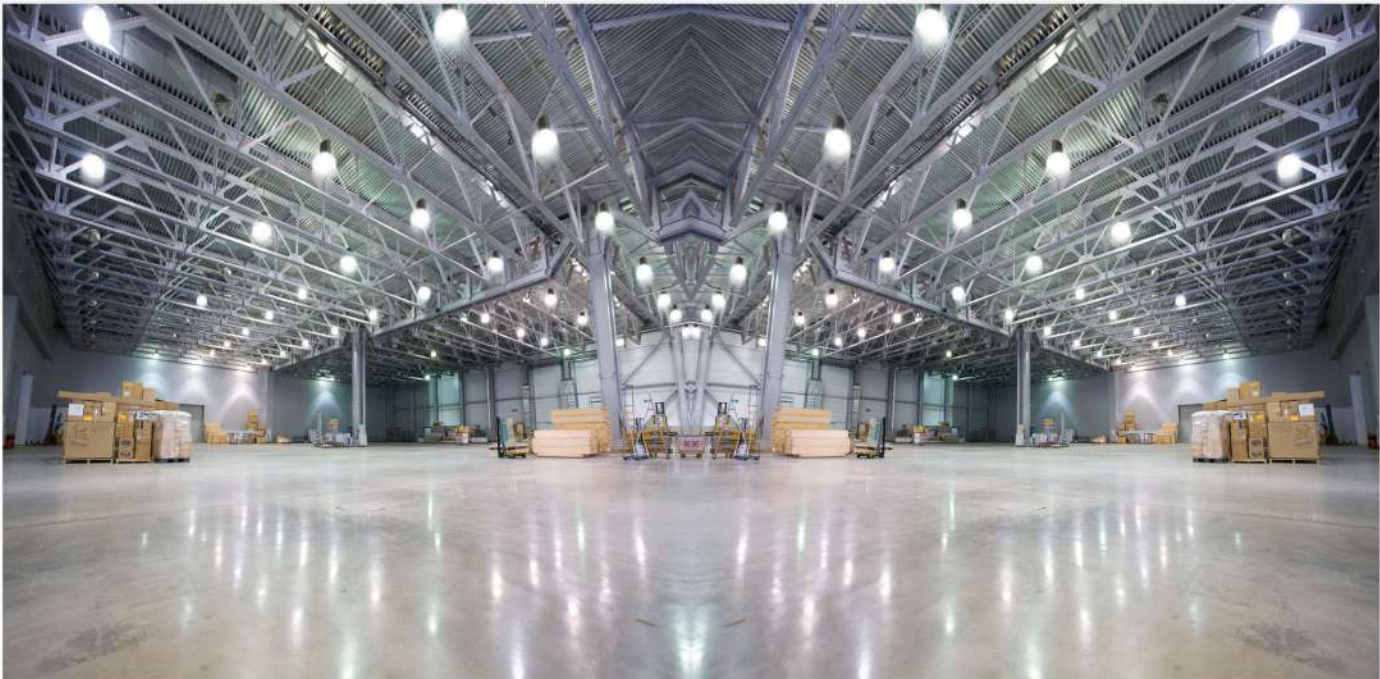


W HDK 400 H 4113 LC

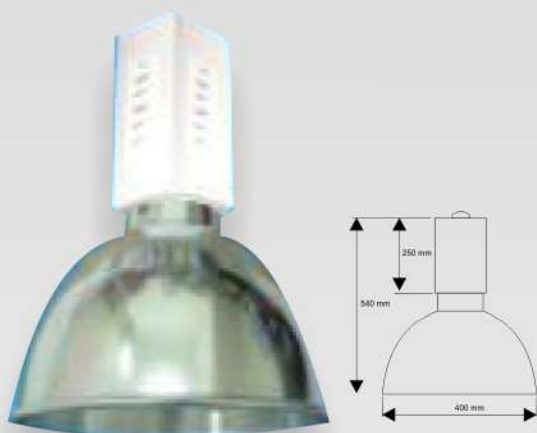


W HDK 400 c/w Glass Cover H 4114 LC

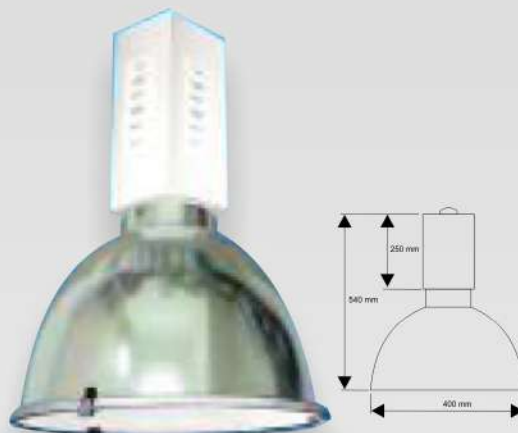


W HDK 500 H 4115 LC

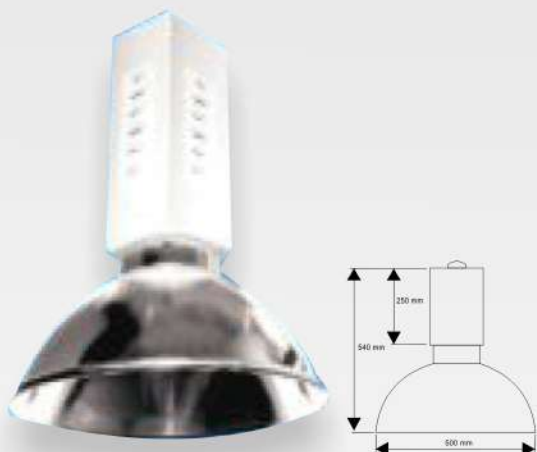

W HDK 500 c/w Glass Cover H 4116 LC

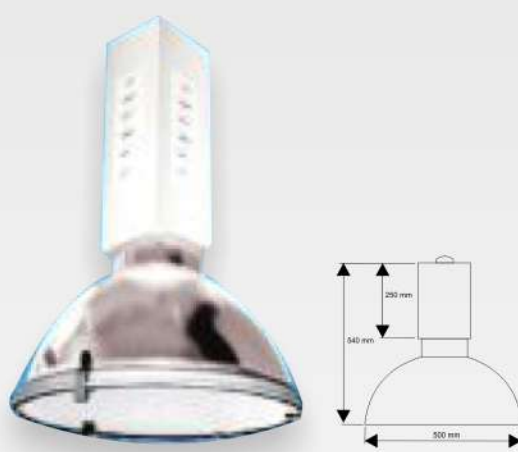

W HIB HPML H 4117 LC

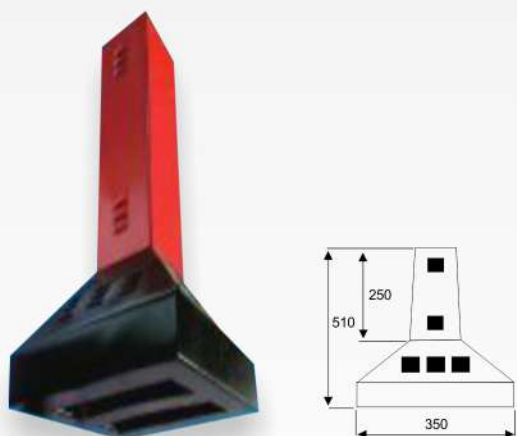

W HDK LED Power 50,100,150W H 4118 LC



downlight
series

office
light

outdoor
luminaire

flood and
spot light

street and
solar cell

wall and
pendat



featured in the store

05

**inspiring street light ideas powered
by the sun, wind, and humans.**

order now

street and solar cell





street and solar cell
(street and solar)

05 >

street and solar cell

STREET & SOLAR CELL

street light series



IP65

tegangan	daya	frekuensi	power factor	power efisiensi
70 ~ 285 VAC 8 ~ 24 VDC (Solar Panel Enabled)	50W	50 ~ 60 Hz	≥ 0.90	≥ 90%
LED Efisiensi : ≥ 100 lumens/watt, Beam Angel : ≥ 120°, LED Lifetime : 50.000 hours, Material : Aluminium Alloy				
70 ~ 285 VAC 8 ~ 24 VDC (Solar Panel Enabled)	100W	50 ~ 60 Hz	≥ 0.90	≥ 90%
LED Efisiensi : ≥ 100 lumens/watt, Beam Angel : ≥ 120°, LED Lifetime : 50.000 hours, Material : Aluminium Alloy				
70 ~ 285 VAC 8 ~ 24 VDC (Solar Panel Enabled)	150W	50 ~ 60 Hz	≥ 0.90	≥ 90%
LED Efisiensi : ≥ 100 lumens/watt, Beam Angel : ≥ 120°, LED Lifetime : 50.000 hours, Material : Aluminium Alloy				
70 ~ 285 VAC 8 ~ 24 VDC (Solar Panel Enabled)	40W	50 ~ 60 Hz	≥ 0.90	≥ 90%
LED Efisiensi : ≥ 100 lumens/watt, Beam Angel : ≥ 120°, LED Lifetime : 50.000 hours, Colour Temperature : 2700K, 3000K, 6000K, 6500K, Material : Aluminium Alloy				
70 ~ 285 VAC 8 ~ 24 VDC (Solar Panel Enabled)	60W	50 ~ 60 Hz	≥ 0.90	≥ 90%
LED Efisiensi : ≥ 100 lumens/watt, Beam Angel : ≥ 120°, LED Lifetime : 50.000 hours, Colour Temperature : 2700K, 3000K, 6000K, 6500K, Material : Aluminium Alloy				




W SL COBRA H 5119 LC




W SL COBRA H 5120 LC



W SL LED 40W H 5121 LC

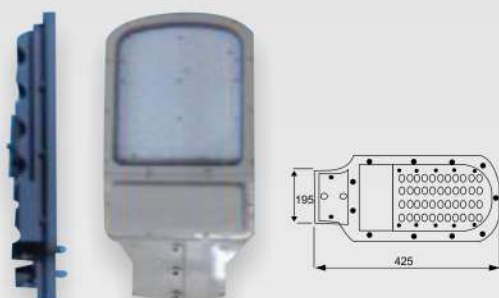

W SL LED 60W H 5122 LC

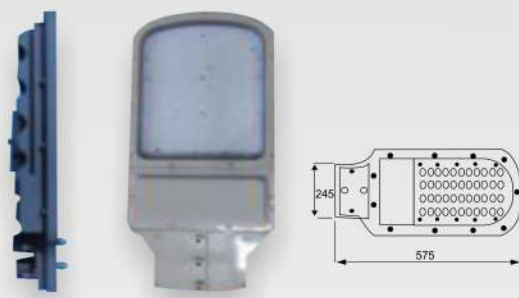


W SL LED 50W H 5123 LC



W SL LED 100W H 5124 LC



W SL LED 150W H 5125 LC

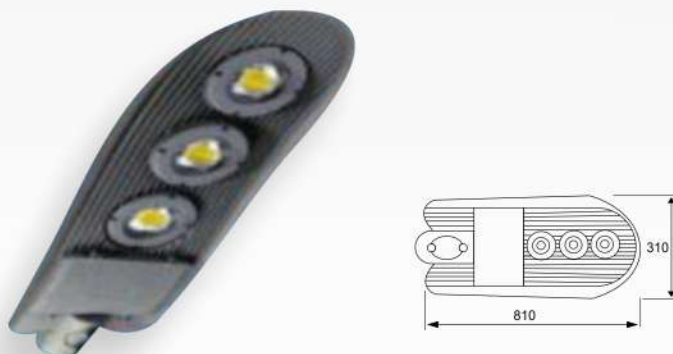

downlight
series

office
light

outdoor
luminaire

flood and
spot light

street and
solar cell

wall and
pendat



featured in the store

06

**double your lighting pleasure
with twin pendant lights.**

order now

—
wall and pendant light





wall and pendant
(wall & pendant)

06 >

wall light series
pendant light series

WALL & PENDANT

wall light series




IP20


In addition to our wonderful range of wall lights, we supply stunning pendant lights for every room and style. Whether you are looking for glass pendant lights or metal pendant lights, classic or modern ones, in a cluster form or a chandelier, our extensive collection is sure to contain something that appeals to you.




W STL WINDOW H 6126 LC

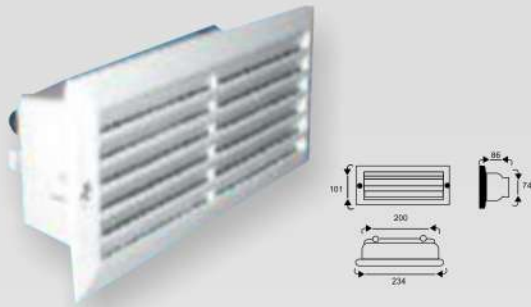


W STL GRILLI H 6127 LC

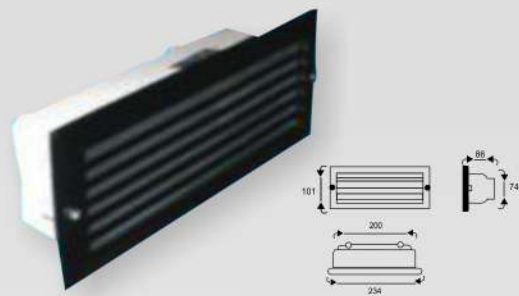


W WL PARKING H 6128 LC

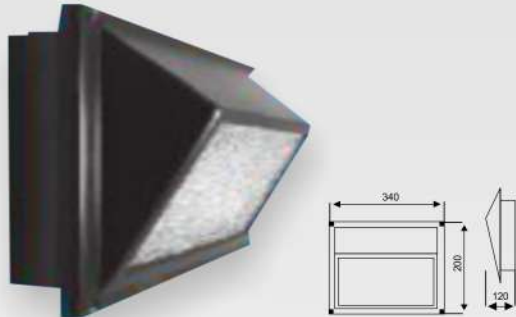


W WL HOTEL H 6129 LC

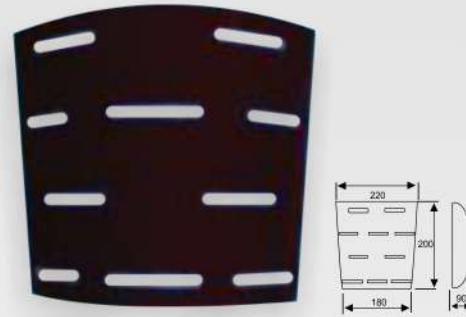

W WL UC H 6130 LC

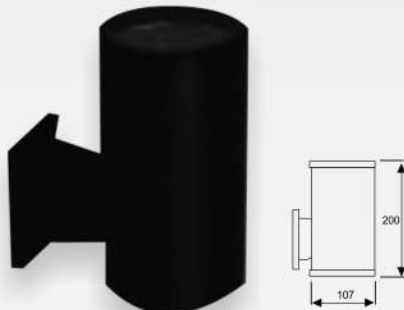

W WL UCD H 6131 LC



downlight
series

office
light

outdoor
luminaire


flood and
spot light

street and
solar cell


wall and
pendat




W WL ACR-D H 6132 LC

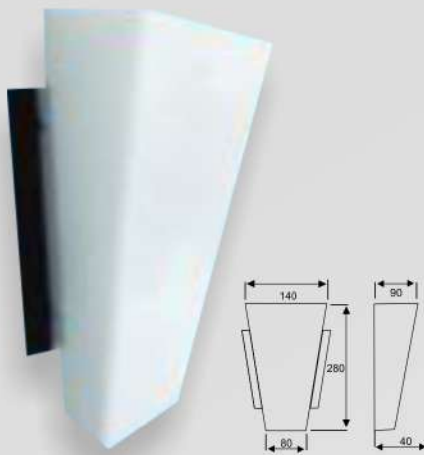


W WL ACR-S H 6133 LC

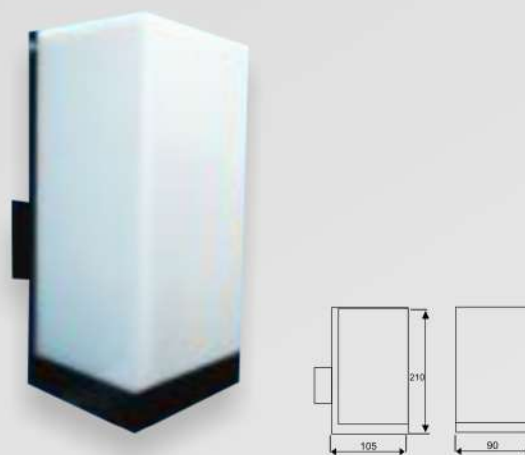

W WL GLO H 6134 LC

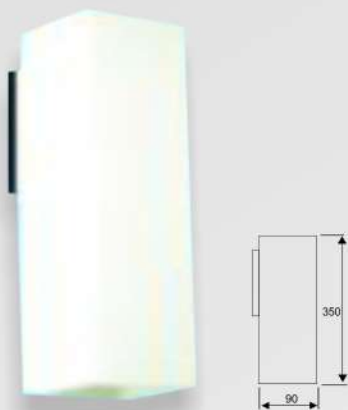

W WL DELTA H 6135 LC

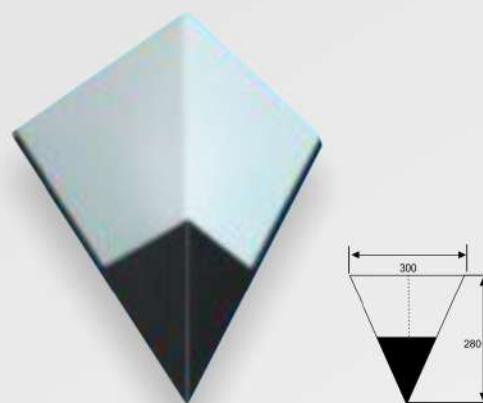

downtlight
series

office
light


outdoor
luminaire

flood and
spot light

street and
solar cell

wall and
pendat


W WL BG MILK H 6136 LC

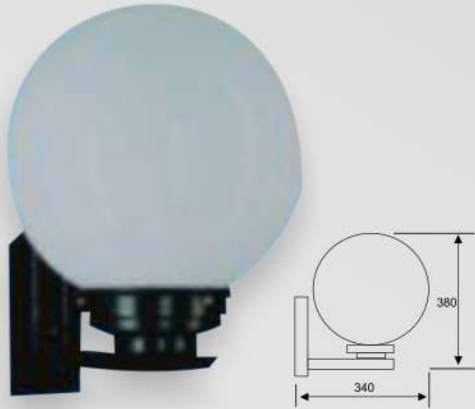

W WL BAMBOLI H 6137 LC



W WL NINO SYZ H 6138 LC

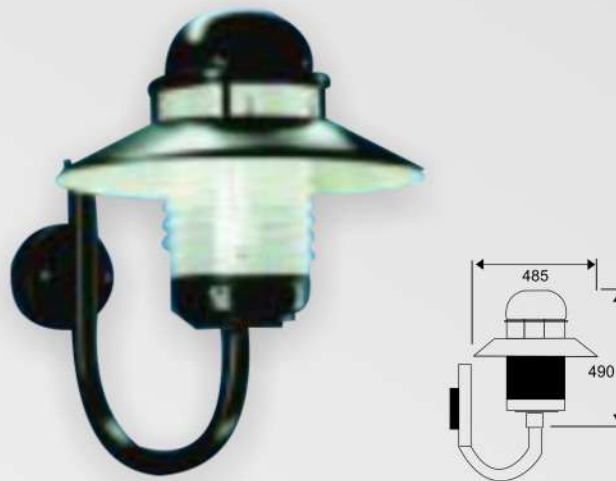

downlight
series

office
light

outdoor
luminaire

flood and
spot light

street and
solar cell

wall and
pendat

WALL & PENDANT

pendant light series

A pendant light sheathed in reeds or wicker can bring in a tropical or bohemian touch to the room, especially in an airy, colorful space.

technical specifications

Housing	Lamp	Fitting	Dimension
Aluminium	Incandescent, Essential & Genie	E27	H 270 mm Ø 465 mm
W PDL CHALLENGER H 6139 LC			
Aluminium	Incandescent, Essential & Genie	E27	H 280 mm Ø 350 mm
W PDL DISCOVERY H 6140 LC			
Aluminium	Incandescent, Essential & Genie	E27	H 240 mm Ø 230 mm
W PDL SWIPY H 6141 LC			
Aluminium	Incandescent, Essential & Genie	E27	H 205 mm Ø 430 mm
W PDL KANTEN H 6142 LC			
Aluminium & Opal Matt Glass	Incandescent, Essential & Genie	E27	H 340 mm Ø 160 mm
W PDL GIOVANI H 6143 LC			
Aluminium & Opal Matt Glass	Incandescent, Essential & Genie	E27	H 1540 mm Ø 400 mm
W PDL GIOVANI-3 H 6144 LC			
Aluminium & Opal Matt Glass	Incandescent, Essential & Genie	E27	H 1540 mm Ø 400 mm
W PDL GIOVANI-S H 6145 LC			
Aluminium & Opal Matt Glass	Incandescent, Essential & Genie	E27	H 1540 mm Ø 400 mm
W PDL SHELA H 6146 LC			
Chrome Metal & Opal Matt Glass	Incandescent, Essential & Genie	E27	H 270 mm Ø 100 mm
W PDL ELISA H 6147 LC			
Chrome Metal & Opal Matt Glass	Incandescent, Essential & Genie	E27	H 1450 mm Ø 300 mm
W PDL ELISA-3 H 6148 LC			
Aluminium & Opal Matt Glass	Incandescent, Essential & Genie	E27	H 280 mm Ø 180 mm
W PDL SIBU H 6149 LC			
Aluminium & Opal Matt Glass	Incandescent, Essential & Genie	E27	H 1500 mm Ø 400 mm
W PDL SIBU-3 H 6150 LC			
Chrome Metal & Opal Matt Glass	Incandescent, Essential & Genie	E27	H 460 mm 160 mm
W PDL BIG GIOVANI H 6151 LC			
Chrome Metal & Opal Matt Glass	Incandescent, Essential & Genie	E27	H 1660 mm 400 mm
W PDL BIG GIOVANI-3 H 6152 LC			
Aluminium & Opal Matt Glass	Incandescent, Essential & Genie	E27	H 400 mm Ø 300 mm
W PDL BG MILK H 6153 LC			
Aluminium	Incandescent, Essential & Genie	E27	H 390 mm Ø 150 mm
W PDL CAFE H 6154 LC			



W PDL CHALLENGER H 6139 LC



W PDL DISCOVERY H 6140 LC



W PDL SWIPY H 6141 LC



W PDL KANTEN H 6142 LC

downlight
series

office
light

W PDL GIOVANI H 6143 LC



W PDL GIOVANI-3 H 6144 LC



W PDL GIOVANI-5 H 6145 LC



W PDL SHELA H 6146 LC



outdoor
luminaire

flood and
spot light



street and
solar cell

wall and
pendat

downlight
series

office
light

outdoor
luminaire

flood and
spot light

street and
solar cell

wall and
pendat



W PDL ELISA H 6147 LC



W PDL ELISA-3 H 6148 LC



W PDL SIBU H 6149 LC



W PDL SIBU-3 H 6150 LC

W PDL BIG GIOVANI H 6151 LC



W PDL BIG GIOVANI-3 H 6152 LC




W PDL BG MILK H 6153 LC



W PDL CAFE H 6154 LC



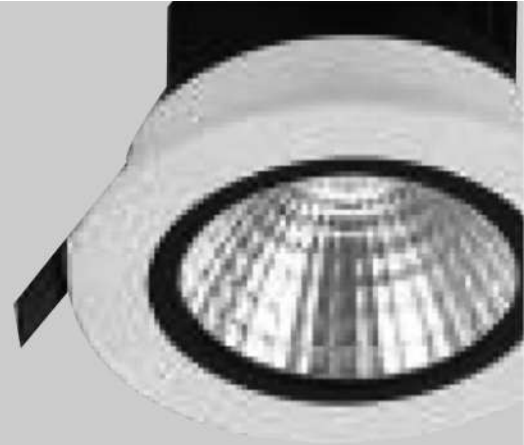

WINNO
create your big dream



head office :

Gobel, Jl. Lembah Hijau
jl. Padi Traktor 1 no. 14.
RT/RW 07/013, Mekarsari,
Kec, Cimanggis Kota Depok,
Jawa Barat 16452

contact us :

wa : (+62) 821 7655 4141
email : sales@winno.id
web : www.winno.id

