


DOWNLIGHT SERIES

downlight SET series

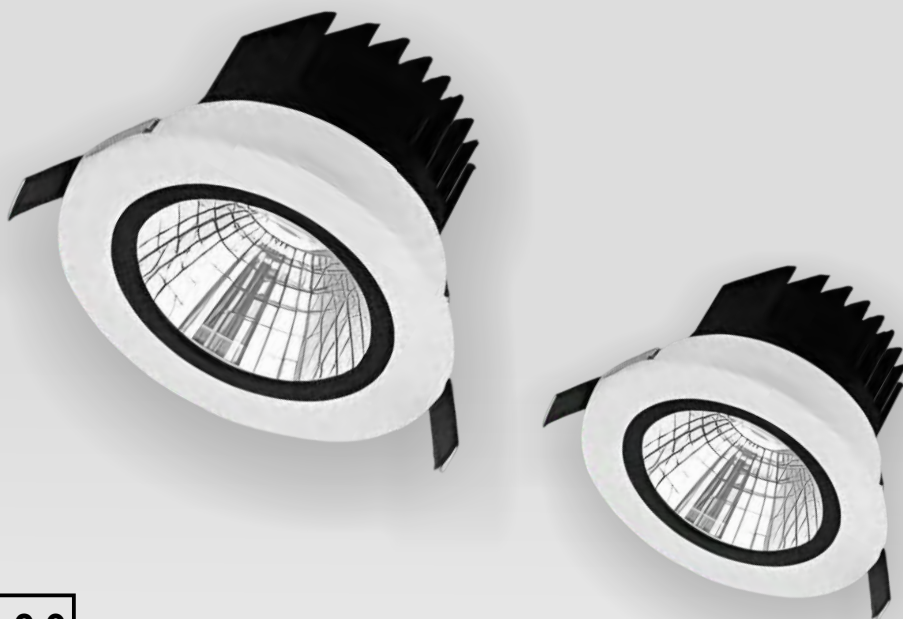


IP20


Pf 0,9

> including LED Downlight


name product	voltage	power factor	current	frequency	power	material
W DLR-COB LED 5W S 721 OS	230,80 V	0,9010	0,0250A	50,00 Hz	5,40 W	aluminium alloy
luminous flux : 480,7 lm ,efficiency : 85,32 lm/W, radiant : 1,474 W						
W DLR-COB LED 9W S 722 OS	230,80 V	0,9530	0,0470A	50,00 Hz	10,40 W	aluminium alloy
luminous flux : 853,4 lm ,efficiency : 82,06 lm/W, radiant : 2,819 W						
W DLR-COB LED 20W S 723 OS	230,80 V	0,9660	0,0960A	50,00 Hz	21,90 W	aluminium alloy
luminous flux : 1804,2,4lm ,efficiency : 82,38 lm/W, radiant : 3,561 W						
W DLR-COB LED 15W S 724 OS	230,80 V	0,9690	0,0700A	50,00 Hz	15,60 W	aluminium alloy
luminous flux : 1303,2,4lm ,efficiency : 83,54 lm/W, radiant : 4,194 W						
W DLR-COB LED 30W S 725 OS	230,80 V	0,9660	0,1310A	50,00 Hz	28,90 W	aluminium alloy
luminous flux : 2564,9,4lm ,efficiency : 88,75 lm/W, radiant : 7,043 W						

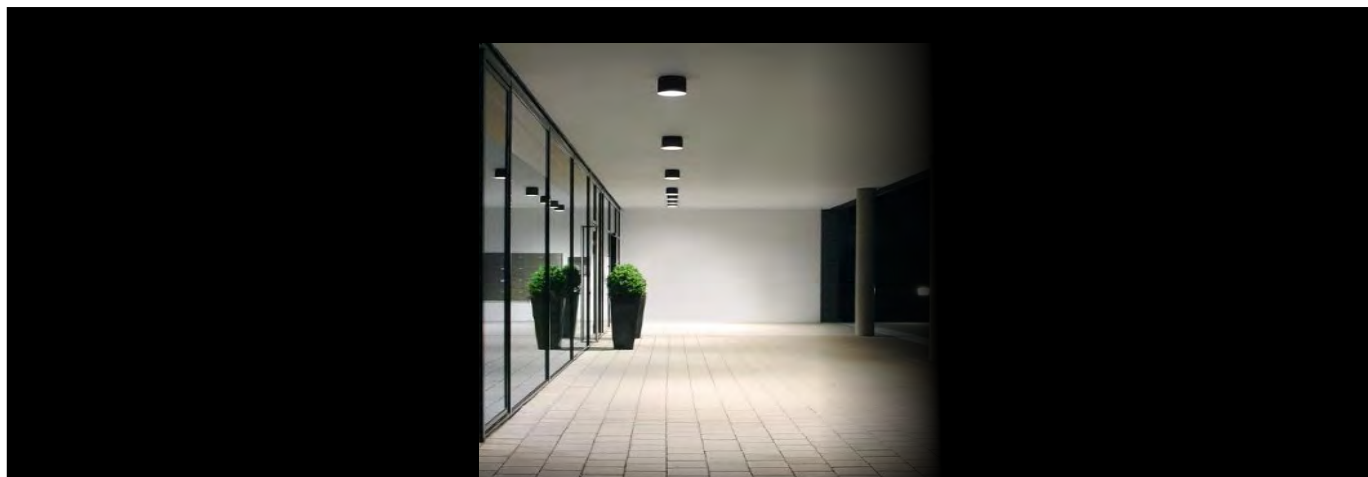


W DLR-COB LED 5W S 721 OS




W DLR-COB LED 9W S 722 OS




W DLR-COB LED 20W S 723 OS




W DLR-COB LED 15 W S 724 OS



W DLR-COB LED 30W S 725 OS



W DLR-Serta LED 726 OS



TYPE	DIMENSION (mm)		
	D	D1	H
RD 125 3,6,9W	150	125	80
RD 150 12,15,18W	175	150	80
RD 175 28,36,50 W	195	175	80

downlight
series

office
light

outdoor
luminaire

flood and
spot light

street and
solar cell

wall and
pendat

DOWNLIGHT
SET LIGHT