

OFFICE LIGHT

emergency light series



IP20

Slimline LED

- Ultra bright white LEDs meeting ISO safety colour requirements.
- Exceeds IEC 60598-2-22 and S5 563 brightness requirements.
- Extra low power consumption.
- High Quality, Long Life SMD LED module.
- High efficiency charger and LED converter.
- Series connection of LEDs provides equal biasing of all LEDs ensures maximum LED life span and uniform light distribution.
- Add-on plate for recess mounting
- Low battery voltage cut-off with latch function, la eliminate batter over discharge.
- Charge indicator and test switch.

Technical Specifications

Model Number : EX-LED-M

Mode Of Operation : Maintained

Lamp : 1,2 W White LED module with burning life-span > 50.000 hours

Rated Duration : 3 Hours

Mains Supply : 220-240 Volts

Mains Frequency : 50-60Hz

Power Consumption : 3W (Total standby power inclusive of LED converter)

Battery : High Temperature Nickel Cadmium

Charger : Regulated variable rate

Charger Monitor : LED

Test Facility : Micro switch

Mounting : Surface mount (Recessed mount option available)

Safety Features : Low battery voltage cut off to prevent over discharge

Recharge Period : < 24 Hours

Diffuser : Acrylic plate (Fire retardant)

Fitting Construction : Electro galvanized steel, epoxy powder coating for casing and gear tray

Weight : Approximately 2,1 Kg

Dimensions : 256mm (H) x 376mm (W) x 46mm (D)

Standards / Compliance : IEC 60598-2-22, S5 263 Part 2, S5 563

Approvals : TÜV SÜD PSB, PSB PLS (Product Listing Scheme)



Ordering Guide

Legend	Single Sided	Double Sided
	EX-LED-M-S-RM	EX-LED-M-D-RM
	EX-LED-M-SR-RM	EX-LED-M-DR-RM
	EX-LED-M-SL-RM	EX-LED-M-DL-RM
	EX-LED-M-S	EX-LED-M-D
	EX-LED-M-SR	EX-LED-M-DR
	EX-LED-M-SL	EX-LED-M-DL



Twin Spot LED

- Weatherproof design suitable for outdoor applications.
- Low heat generation, ensures longer and reliable service life.
- Low battery voltage cut-off with latch function, to eliminate battery over discharge
- Charge LED indicator and test button.

TECHNICAL SPECIFICATIONS

Model Number :

TED10NM(WP)

Mode of Operation :	Non maintained
Lamp :	2 x 3.6V / 1A Power LED module
Rated Duration :	2 Hours
Mains Supply :	220-240 Volts
Mains Frequency :	50-60Hz
Power Consumption :	< 1,5W
Battery :	High Temperatur Nickel Cadmium
Charger :	Regulated variable rate
Charge Monitor :	LED
Test Facility :	Momentary test switch
Safety Features :	Low battery voltage cut off to prevent over discharge
Recharge Period :	< 24 Hours
Fitting Construction :	Moulded Fire restardant (UL94) housing and diffuser.
Weight :	Approximately 2.5 Kg
Dimensions :	330mm (W) x 28mm (H) x 130mm (D)
Standards / Compliance :	IEC 60598-2-22, SS 263 Part 2, SS 563
Approvals :	PSB Type test, PSB PLS (Product Listing Scheme)

downlight
series

office
light

outdoor
luminaire

flood and
spot light


street and
solar cell

wall and
pendat

W EXIT BOX H 858 LC



W TWIN SPOT LED H 859 LC

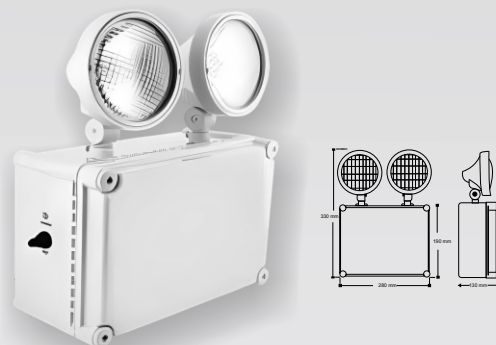

W EXIT SLIM LED (Surface) H 860 LC



W EXIT SLIM LED (Recessed) H 861 LC



W EXIT SLIM H 862 LC

