



flood & spot light
(flood & spot)

04 >

flood & spot light series
high bay light

FLOOD & SPOT LIGHT

flood & spot light series



IP65



nama produk	tegangan	daya	frekuensi	power factor	power efisiensi
W FL LED 10W H 4102 LC	70 ~ 285 VAC 8 ~ 24 VDC (Solar Panel Enabled)	10W	50 ~ 60 Hz	≥ 0.90	$\geq 90\%$
LED Efisiensi : ≥ 100 lumens/watt, Beam Angel : $\geq 120^\circ$, LED Lifetime : 50.000 hours, Material : Alumunium Alloy, IP Rating : IP65					
W FL LED 20W H 4103 LC	70 ~ 285 VAC 8 ~ 24 VDC (Solar Panel Enabled)	20W	50 ~ 60 Hz	≥ 0.90	$\geq 90\%$
LED Efisiensi : ≥ 100 lumens/watt, Beam Angel : $\geq 120^\circ$, LED Lifetime : 50.000 hours, Material : Alumunium Alloy, IP Rating : IP65					
W FL LED 30W H 4104 LC	70 ~ 285 VAC 8 ~ 24 VDC (Solar Panel Enabled)	30W	50 ~ 60 Hz	≥ 0.90	$\geq 90\%$
LED Efisiensi : ≥ 100 lumens/watt, Beam Angel : $\geq 120^\circ$, LED Lifetime : 50.000 hours, Material : Alumunium Alloy, IP Rating : IP65					
W FL LED 50W H 4105 LC	70 ~ 285 VAC 8 ~ 24 VDC (Solar Panel Enabled)	50W	50 ~ 60 Hz	≥ 0.90	$\geq 90\%$
LED Efisiensi : ≥ 100 lumens/watt, Beam Angel : $\geq 120^\circ$, LED Lifetime : 50.000 hours, Material : Alumunium Alloy, IP Rating : IP65					
W FL LED 100W H 4106 LC	70 ~ 285 VAC 8 ~ 24 VDC (Solar Panel Enabled)	100W	50 ~ 60 Hz	≥ 0.90	$\geq 90\%$
LED Efisiensi : ≥ 100 lumens/watt, Beam Angel : $\geq 120^\circ$, LED Lifetime : 50.000 hours, Material : Alumunium Alloy, IP Rating : IP65					
W FL LED 150W H 4107 LC	70 ~ 285 VAC 8 ~ 24 VDC (Solar Panel Enabled)	150W	50 ~ 60 Hz	≥ 0.90	$\geq 90\%$
LED Efisiensi : ≥ 100 lumens/watt, Beam Angel : $\geq 120^\circ$, LED Lifetime : 50.000 hours, Material : Alumunium Alloy, IP Rating : IP65					

Good backyard lighting ideas can transform your yard and max up its potential as an extra space to enjoy in the evening.

The right lighting can spotlight focal points such as planting and help to zone different areas for relaxing, alfresco cooking or gathering or drinks.



nama produk	daya	tegangan	frekuensi	efisiensi	luminous flux	faktor daya
W FL LED 500W H 4108 LC	500W	85 ~ 265 VAC	50 ~ 60 Hz	100lm/watt	> 50.000lm	> 0.95
Angle cahaya : 25°,45°,60°,90°,100°, CRI : 80, LED life : 50.000 hours, IP : IP65, material : aluminium alloy, fin cooling module, tempered glass						
W FL LED 1000W H 4109 LC	1000W	85 ~ 265 VAC	50 ~ 60 Hz	100lm/watt	> 100.000lm	> 0.95
Angle cahaya : 25°,45°,60°,90°,100°, CRI : 80, LED life : 50.000 hours, IP : IP65, material : aluminium alloy, fin cooling module, tempered glass						
W FLB LED 80-150W H 4110 LC	80W/100W/120W/150W	85 ~ 265 VAC	50 ~ 60 Hz	120-140lm/watt	> 9.600/12.000/14400/18000lm	> 0.95
Angle cahaya : 25°,45°,60°,90°, CRI : 80, LED life : 50.000 hours, IP : IP65, material : aluminium alloy, fin cooling module, tempered glass						
W FLB LED 200W H 4111 LC	200W	85 ~ 265 VAC	50 ~ 60 Hz	120-140lm/watt	> 24.000lm	> 0.95
Angle cahaya : 25°,45°,60°,90°, CRI : 80, LED life : 50.000 hours, IP : IP65, material : aluminium alloy, fin cooling module, tempered glass						
W FLB LED 300W H 4112 LC	300W	85 ~ 265 VAC	50 ~ 60 Hz	120-140lm/watt	> 36.000lm	> 0.95
Angle cahaya : 25°,45°,60°,90°, CRI : 80, LED life : 50.000 hours, IP : IP65, material : aluminium alloy, fin cooling module, tempered glass						



downlight
series

office
light

outdoor
luminaire

flood and
spot light


street and
solar cell

wall and
pendat


W FL E40 2000W H 490 LC




W FL E40 1000W H 491 LC

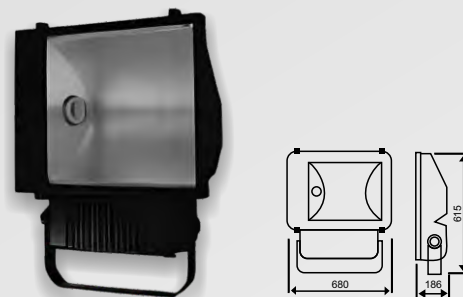


W FL E40 250-400W H 492 LC

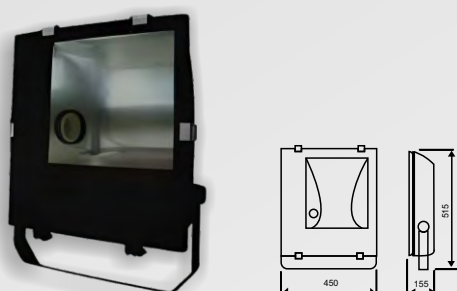


W FL MHN-TD 70-150W H 493 LC

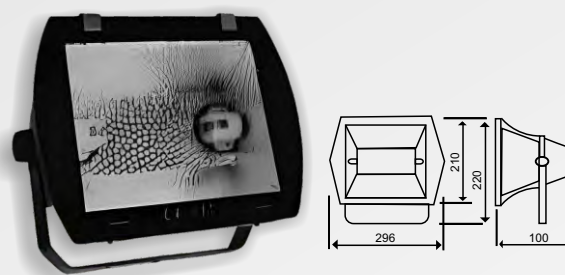

W FL MHN-TD 70-150W H 494 LC

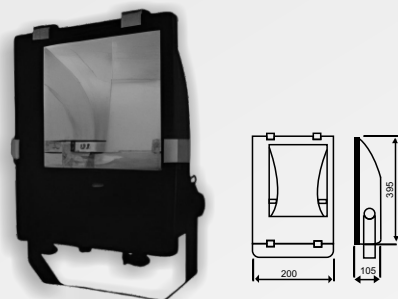


W FL Halogen 1000W H 495 LC

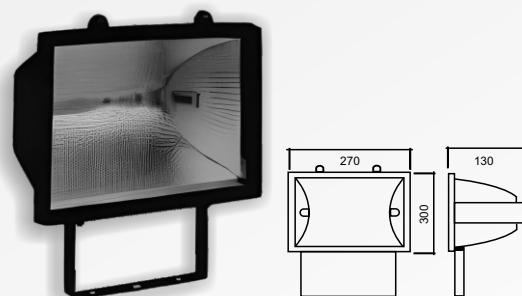


W GL Spot Par 30/75W H 496 LC



W GL Spot Par 30/75W H 497 LC

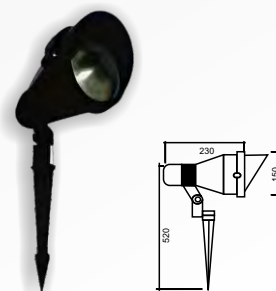


W FL LED 10W H 4102 LC

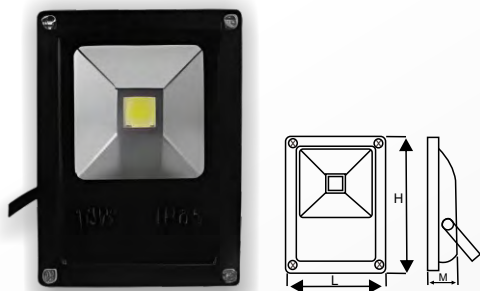

DIMENSION (mm)

L	H	M
90	112	40

W FL LED 20W H 4103 LC

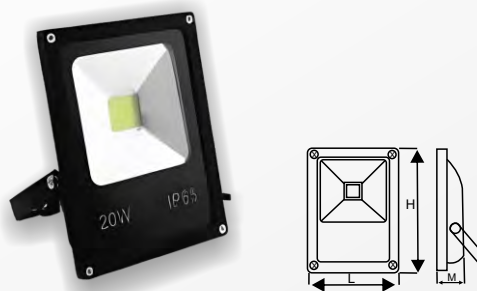

DIMENSION (mm)

L	H	M
140	180	40

W FL LED 30W H 4104 LC



DIMENSION (mm)

L	H
206	165

W FL LED 50W H 4105 LC



DIMENSION (mm)

L	H
250	200



downlight
series

office
light

outdoor
luminaire

flood and
spot light

street and
solar cell

wall and
pendat

downlight
series

office
light


outdoor
luminaire

flood and
spot light


street and
solar cell

wall and
pendat


W SP RMA H 498 LC




W ST RMR H 499 LC






W GL Spot SPA H 4100 LC






W GL Spot SPR H 4101 LC




W FL LED 500W H 4108 LC

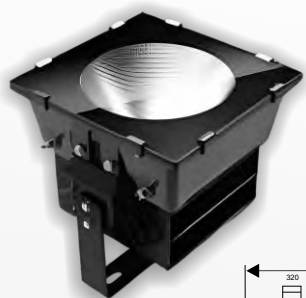

W FL LED 1000W H 4109 LC

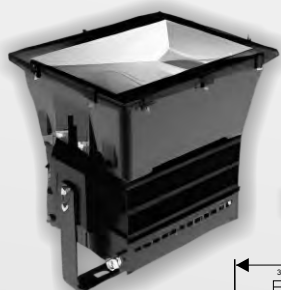


W FL LED 100W H 4106 LC



DIMENSION (mm)

L	H
375	240

W FL LED 150W H 4107 LC



DIMENSION (mm)

L	H
520	236

downlight
series

office
light

outdoor
luminaire

flood and
spot light

street and
solar cell

wall and
pendat

downlight
series

office
light






outdoor
luminaire

flood and
spot light





street and
solar cell

wall and
pendat


W FLB LED 80-150W H 4110 LC



W FLB LED 200W H 4111 LC



W FLB LED 300W H 4112 LC

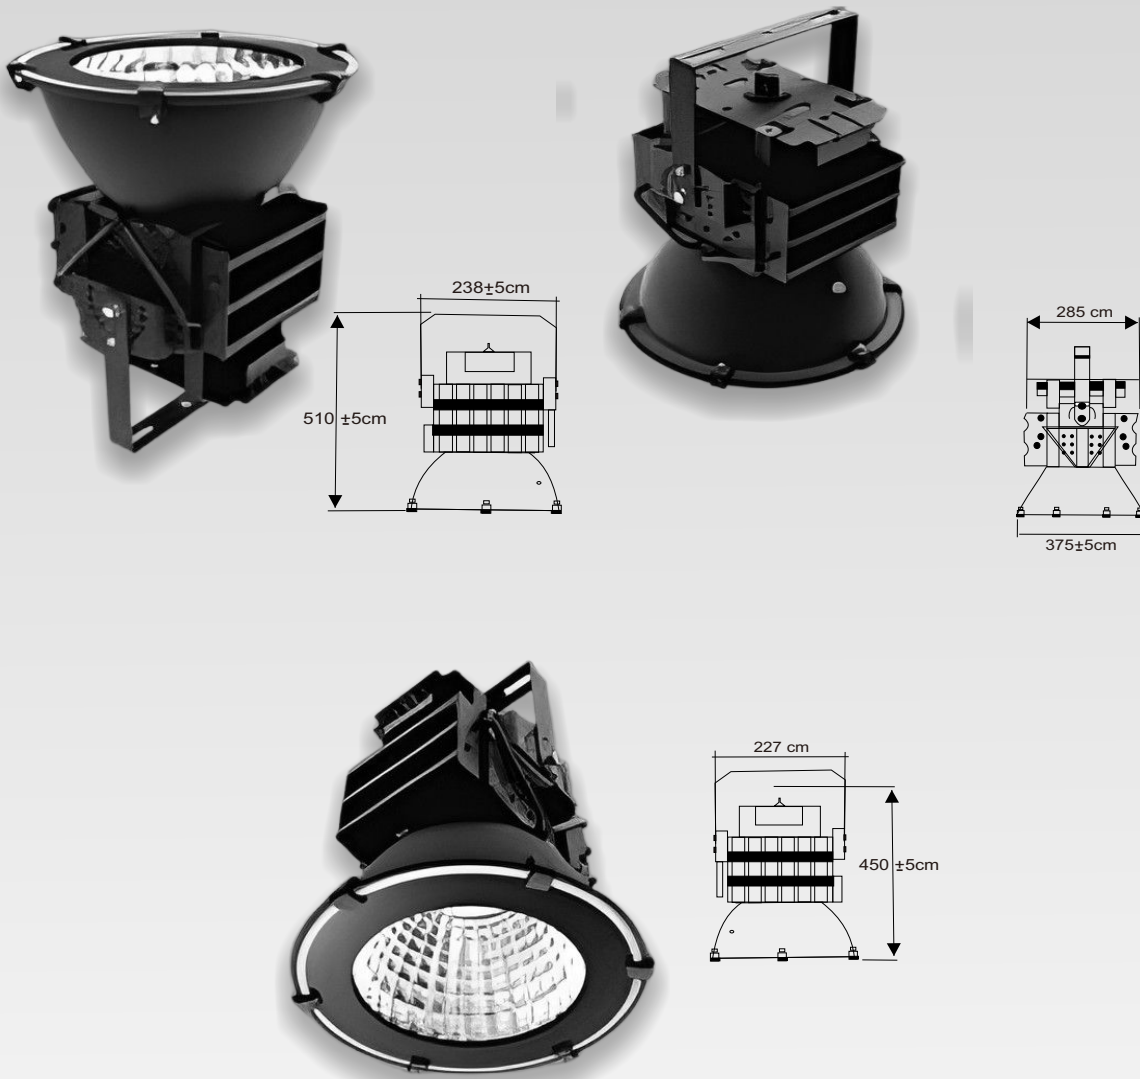

downlight
series

office
light

outdoor
luminaire

flood and
spot light

street and
solar cell

wall and
pendat

